

Dynamic user equilibrium with elastic demand and bounded rationality: Formulation, qualitative analysis and computation

Ke Han^{a*} Terry L. Friesz^{b†} Tao Yao^{b‡}

^a*Department of Mathematics*

Pennsylvania State University, University Park, PA 16802, USA

^b*Department of Industrial and Manufacturing Engineering*

Pennsylvania State University, University Park, PA 16802, USA

Abstract

This paper is concerned with two extensions of the *simultaneous route-and-departure choice* (SRDC) *dynamic user equilibrium* (DUE) originally proposed by Friesz et al. (1993). The first extension is an SRDC DUE with elastic travel demand, denoted by E-DUE, in which the trip matrix is determined endogenously. The second extension is a *bounded rationality* SRDC DUE, denoted by BR-DUE, in which travelers do not always seek the least costly route-and-departure-time choice. We propose to analyze and compute these two types of equilibrium models using the emerging mathematical paradigm of *differential variational inequality* (Pang and Stewart, 2008). As we shall explain, both extensions can be expressed in continuous time as a variational inequality (VI) and a differential variational inequality (DVI). The VI is a canonical mathematical form which allows existence results to be established by means of Brouwer's fixed point theorem (Han et al., 2013c,d). The DVI formulation enables us to reformulate both E-DUE and BR-DUE as fixed-point problems in proper Hilbert spaces, by employing necessary optimality conditions for optimal control problems. We devise two fixed-point iterative algorithms for computing E-DUE and BR-DUE in continuous time followed by some qualitative analysis on the convergence issue. Both algorithms can accommodate a wide range of analytical or simulation-based *dynamic network loading* submodels. We demonstrate the efficiency and convergence of these algorithms with several numerical studies on the Sioux Falls network.

Keywords:

simultaneous route-and-departure choice dynamic user equilibrium, elastic demand, bounded rationality, differential variational inequality, fixed-point algorithm

1 Introductory Remarks

This paper is concerned with two extensions of the simultaneous route-and-departure choice dynamic user equilibrium (SRDC DUE) originally proposed in Friesz et al. (1993) and discussed subsequently by Friesz and Mookherjee (2006); Friesz et al. (2011, 2013); and Friesz and Meimand (2013). The first extension relaxes the assumption of fixed trip volumes by considering elastic travel demands among origin-destination pairs. As such, it is concerned

*Corresponding author, e-mail: kxh323@psu.edu

†e-mail: tfriesz@psu.edu

‡e-mail: tyyl1@engr.psu.edu

with SRDC-DUE for which travel cost, including delay as well as early/late arrival penalties, are equilibrated and demand is determined endogenously. The second extension incorporates the concept of *bounded rationality* (BR) proposed by Simon (1957, 1990, 1991) in the modeling of travel behavior. Bounded rationality-based traffic equilibrium models operate under the assumption that travelers, viewed as Nash agents, do not behave in a completely rational manner.

1.1 Dynamic user equilibrium with elastic demand

Most of the studies of DUE reported in the *dynamic traffic assignment* (DTA) literature are about dynamic user equilibrium with constant travel demand for each origin-destination pair. It is, of course, not generally true that travel demand is fixed, even for short time horizons. Arnott et al. (1993) and Yang and Huang (1997) directly consider elastic travel demand in the context of a single bottleneck. Yang and Meng (1998) extend a simple bottleneck model to a general queuing network with known elastic demand functions for each origin-destination (OD) pair. They employ a *space-time expanded network* (STEN) representation of the network loading submodel. Wie et al. (2002) study a version of the dynamic user equilibrium with elastic demand, using a complementarity formulation that requires path delays to be expressible in closed form. Szeto and Lo (2004) study dynamic user equilibrium with elastic travel demand when network loading is based on the *cell transmission model* (CTM); their formulation is discrete-time in nature and is expressed as a finite-dimensional variational inequality (VI). The VI is solved with a descent method under the assumption that the delay operator is co-coercive, or to have the Dunn property (Farouq, 2001). Han et al. (2011) study dynamic user equilibrium with elastic travel demand for a network with a single origin-destination pair whose traffic flow dynamics are also described by CTM; the CTM is chosen to accommodate the discrete-time complementarity formulation of the user equilibrium model.

Although Friesz et al. (2011) show that analysis and computation of dynamic user equilibrium with constant travel demand is tremendously simplified by stating it as a differential variational inequality (DVI), they do not discuss how elastic demand may be accommodated within a DVI framework. Friesz and Meimand (2013) later extend the DVI formulation to an elastic demand setting, although that paper does not discuss computation of E-DUE, which is our main focus herein. Such a DVI formulation of elastic demand DUE is not straightforward. In particular, the DVI presented therein has both infinite-dimensional and finite-dimensional terms. Moreover, for any given origin-destination pair, inverse travel demand corresponding to a dynamic user equilibrium depends on the terminal value of a state variable representing cumulative departures. The DVI formulation achieved in that paper is significant because it allows the still emerging theory of differential variational inequalities to be employed for the analysis and computation of solutions of the elastic-demand DUE problem when simultaneous departure time and route choice are within the purview of users, all of which constitutes a foundation problem within the field of dynamic traffic assignment. Han et al. (2013d) study the existence of E-DUE proposed in Friesz and Meimand (2013) by formulating it as an infinite-dimensional variational inequality in a Hilbert space, and by applying an extension of Brouwer’s fixed theorem (Browder, 1968).

A good review of recent insights into abstract differential variational inequality theory, including computational methods for solving such problems, is provided by Pang and Stewart (2008). Also, differential variational inequalities involving the kind of explicit, agent-specific control variables employed herein are presented in Friesz (2010).

One of the main goals of this paper is to establish the most general framework for computing simultaneous route-and-departure choice E-DUE, regardless of the underlying traffic flow model or the *dynamic network loading* (DNL) subproblem employed. We also wish to provide analysis on the convergence of the proposed algorithm. To this end, we present and prove an equivalent *fixed-point-problem* (FPP) formulation of the SRDC E-DUE, and devise a fixed-point iteration scheme for computing it in continuous time. As stated in the literature review above, most computational schemes rely on a specific type of DNL model. To the best knowledge of the authors, the proposed fixed-point algorithm is the first general computational method that is applicable with any DNL submodel and elastic demand function under mild assumptions.

1.2 Bounded rationality dynamic user equilibrium

In dynamic traffic assignment (DTA) problems, the modeling of travelers' route and departure time choices have been greatly influenced by Wardrop's first principle (Wardrop, 1952), which states that road users behave in a completely rational way and seek to minimize their own disutility by adjusting route and/or departure time choices. There are multiple means of expressing the dynamic notion of Wardropian user equilibrium, such as variational inequality (Friesz et al., 1993; Han et al., 2013c,d; Szeto and Lo, 2004), differential variational inequality (Friesz et al., 2001, 2011, 2013), and nonlinear complementarity problem (Han et al., 2011; Wie et al., 2002). While admitting a number of canonical mathematical representations, the notion of complete rationality user equilibrium may enjoy less support from the point of view of human behavior and from empirical evidence. That is, travelers may not always choose the departure time and route that yield the minimum travel cost. Such a situation could be caused by (1) imperfect travel information; and (2) certain "inertia" in decision-making. Moreover, empirical studies suggest that in reality, drivers do not always follow the least costly route-and-departure-time choice (Avineri and Prashker, 2004).

As a relaxation of the otherwise restrictive Wardropian assumption, the notion of bounded rationality is proposed by Simon (1957, 1990, 1991) and introduced to traffic modeling by Mahmassani and Chang (1987). In prose, the notion of bounded rationality postulates a range of acceptable travel costs that, when achieved, do not incentivize travelers to switch their departure time or route choice. Such a range is phrased by Mahmassani and Chang (1987) as "indifference band". The width of such band, usually denoted by ε , is either derived through a behavioral study of road users or calibrated by empirical observation (Hu and Mahmassani, 1997; Mahmassani and Jayakrishnan, 1991; Mahmassani and Liu, 1999). In general, ε could depend on origin-destination pairs and/or travel commodities. Bounded rationality user equilibrium plays an important role in transportation modeling and particularly in *static traffic assignment* (STA), with an incomplete list of papers including Di et al. (2013); Gifford and Checherita (2007); Han and Timmermans (2006); Khisty and Arslan (2005); Luo et al. (2010) and Marsden et al. (2012). It is also investigated via simulations-based approaches (Mahmassani and Liu, 1999; Mahmassani et al., 2005).

Although the concept of bounded rationality have been used extensively in STA and simulation-based models, there have been very few analytical results regarding bounded rationality in dynamic traffic assignment (DTA). Szeto (2003) and Szeto and Lo (2006) are the first to propose bounded rationality dynamic user equilibrium (BR-DUE), although it is phrased differently as *tolerance-based dynamic user optimal* by the authors. In Szeto and Lo (2006), a *route-choice* (RC) BR-DUE is formulated as a discrete-time nonlinear complementarity problem. They propose a heuristic route-swapping algorithm adapted from Huang and Lam (2002)

to solve the RC BR-DUE. Since then, no further extension of such BR-DUE has been made in the literature. In this paper, we propose a (differential) variational inequality framework in which the simultaneous-route-and-departure choice (SRDC) BR-DUE can be analyzed and computed; thus advancing the model of BR-DUE to accommodate more general travel choices. Moreover, our analysis and computational tool do not require specific forms of the dynamic network loading (DNL) submodel, thus can be applied to traffic modeling with a wide range of analytical or simulation-based DNL procedures. As minor extension of the proposed model, we also consider the cases where the “tolerance”, or ε , can depend on origin-destination pairs and travel commodities. All these extensions, as we shall illustrate in this paper, can be easily handled by the mathematical paradigms of variational inequality and differential variational inequality.

1.3 The VI and DVI framework for analyzing DUE

In this paper, we present a unified theory and a general framework for analyzing the aforementioned two extensions of SRDC DUE proposed by Friesz et al. (1993), and many others to be yet identified. In particular, we present variational inequality (VI) and differential variational inequality (DVI) formulations of dynamic user equilibrium with elastic demand (E-DUE) and bounded rationality dynamic user equilibrium (BR-DUE), when simultaneous departure time and route choice are within the purview of users. As we shall demonstrate in the paper, the notions of elastic demand and bounded rationality can be easily captured by variational inequalities defined in appropriate Hilbert spaces. These VI formulations also facilitate the derivation of existence results in continuous time, by invoking a version of Brouwer’s fixed point theorem (Browder, 1968), see also Han et al. (2013c) for an example.

The computation of a DUE is best facilitated by the mathematical paradigm of differential variational inequality (DVI) (Pang and Stewart, 2008) and emerging computational algorithms associated therein. The VI formulation, either for E-DUE or BR-DUE, easily transfers to a DVI formulation by means of a two-point boundary value problem. This paper employs the optimal control framework to further establish fixed-point-problem (FPP) formulations of both E-DUE and BR-DUE. As far as we know, the proposed FPP formulations are wholly original in the literature and are established for almost all types of dynamic network loading submodels. As immediate consequences of the FPP formulations, two fixed-point iteration schemes are proposed that computes E-DUE and BR-DUE respectively in continuous time. Each intermediate iteration of the proposed algorithms is equivalent to a linear-quadratic optimal control problem, which we manage to solve in closed-form using necessary optimality conditions for optimal control problems. Qualitative analysis regarding existence of solutions as well as convergence of the iterative algorithms are provided as well. The proposed algorithms are tested numerically; the results demonstrate their effectiveness and solution quality.

The main findings made in this paper include:

- the expression of the simultaneous route-and-departure choice (SRDC) E-DUE problem as a fixed-point problem that subsumes several existing models we reviewed above;
- a continuous-time algorithm for the above fixed-point problem that, unlike many existing algorithms, accommodates a wide range of analytical or simulation-based dynamic network loading procedures;
- the variational inequality and differential variational inequality representations of SRDC BR-DUE, which simplify the analysis of BR equilibrium such as existence, and allows heterogeneity in the indifference band to be captured;

- the expression of the SRDC BR-DUE as a fixed-point problem and a continuous-time algorithm that computes SRDC BR-DUE, which also encapsulates almost all types of dynamic network loading models; and
- convergence results for the two continuous-time algorithms mentioned above for a limited class of path delay operators.

1.4 Organization

The rest of this paper is organized as follows. Section 2 provides a general review of the notations and assumptions employed in the notion of dynamic user equilibrium proposed by Friesz et al. (1993). Section 3 conducts detailed analysis of the simultaneous route-and-departure choice (SRDC) DUE with elastic demand (E-DUE) on a general network, using the theories of differential variational inequality and optimal control. A fixed-point formulation and algorithm are proposed that allow the E-DUE to be computed in continuous-time. In Section 4, we introduce, for the first time, the variational inequality (VI) formulation of SRDC DUE with bounded rationality (BR). As we explain, the notion of BR can be naturally captured by the VI formulation with appropriately defined principal operator. As an immediate consequence of the VI formulation, we present the differential variational inequality (DVI) and fixed point problem (FPP) formulations of BR-DUE. A fixed-point algorithm is also devised that computes BR-DUE in continuous time. Section 5 conduct qualitative analysis of both models by investigating the existence of solutions. Section 6 is concerned with the convergence of the proposed fixed-point algorithms. In Section 7, we conduct numerical tests on the fixed-point algorithms and present solution features as well as convergence results.

2 Notation and Essential Background

For the rest of this paper, the time interval of analysis is a single commuting period or “day” expressed as

$$[t_0, t_f] \subset \mathbb{R}$$

where $t_f > t_0$, and both t_0 and t_f are fixed. Here, as in all DUE modeling, the single most crucial ingredient is the path delay operator, which provides the delay on any path p per unit of flow departing from the origin of that path; it is denoted by

$$D_p(t, h) \quad \forall p \in \mathcal{P}$$

where $\mathcal{P}$ is the set of all paths employed by travelers, t denotes departure time, and h is a vector of departure rates. From these, we construct effective unit path delay operators $\Psi_p(t, h)$ by adding the so-called schedule delay $f(t + D_p(t, h) - T_A)$; that is

$$\Psi_p(t, h) = D_p(t, h) + f(t + D_p(t, h) - T_A) \quad \forall p \in \mathcal{P} \quad (2.1)$$

where T_A is the desired arrival time and $T_A < t_f$. The function $f(\cdot)$ assesses a penalty whenever

$$t + D_p(t, h) \neq T_A \quad (2.2)$$

since $t + D_p(t, h)$ is the clock time at which departing traffic arrives at the destination of path $p \in \mathcal{P}$. Note that, for convenience, T_A is assumed to be independent of destination. However, that assumption is easy to relax, and the consequent generalization of our model is a trivial

extension. We interpret $\Psi_p(t, h)$ as the perceived travel cost of drivers starting at time t on path p under travel conditions h . We stipulate that each

$$\Psi_p(\cdot, h) : [t_0, t_f] \longrightarrow \mathbb{R}_{++} \quad \forall p \in \mathcal{P}$$

is measurable, strictly positive, and square integrable. We employ the obvious notation

$$\Psi(\cdot, h) \doteq (\Psi_p(\cdot, h) : p \in \mathcal{P}) \in \mathbb{R}_{++}^{|\mathcal{P}|}$$

to express the complete vector of effective delay operators.

It is now well known that path delay operators may be obtained from an embedded delay model, data combined with response surface methodology, or data combined with inverse modeling. Unfortunately, regardless of how derived, realistic path delay operators do not possess the desirable property of monotonicity; they may also be non-differentiable.

2.1 Dynamic User Equilibrium Introduced by Friesz et al. (1993)

For the comprehensiveness of our presentation, we recap in this section the notion of dynamic user equilibrium originally articulated by Friesz et al. (1993).

We introduce the fixed trip matrix $(Q_{ij} : (i, j) \in \mathcal{W})$, where each $Q_{ij} \in \mathbb{R}_+$ is the fixed travel demand between origin-destination pair $(i, j) \in \mathcal{W}$, where $\mathcal{W}$ is the set of origin-destination pairs. Note that Q_{ij} represents traffic volume, not flow. Finally we let $\mathcal{P}_{ij} \subset \mathcal{P}$ be the set of paths connecting origin-destination pair $(i, j) \in \mathcal{W}$. As mentioned earlier h is the vector of path flows $h = (h_p : p \in \mathcal{P})$. We denote the space of square integrable functions on the real interval $[t_0, t_f]$ by $L^2[t_0, t_f]$. We stipulate that each path flow is square integrable, that is

$$h \in (L_+^2[t_0, t_f])^{|\mathcal{P}|}$$

where $(L_+^2[t_0, t_f])^{|\mathcal{P}|}$ is the positive cone of the $|\mathcal{P}|$ -fold product of the Hilbert spaces $L^2[t_0, t_f]$. Each element of such set, $h = (h_p : p \in \mathcal{P})$, is interpreted as a vector of *departure-time densities*, or more simply path flows, measured at the entrance of the first arc of the relevant path. It will be seen that these departure time densities are defined only up to a set of measure zero. With this in mind, let ν denote a Lebesgue measure on $[t_0, t_f]$, and let $\forall_\nu(t) \in [t_0, t_f]$ denote the phrase for ν -almost every $t \in [t_0, t_f]$.

We write the flow conservation constraints as

$$\sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} h_p(t) dt = Q_{ij} \quad \forall (i, j) \in \mathcal{W} \quad (2.3)$$

where (2.3) consists of Lebesgue integrals. Using the notation and concepts we have mentioned, the feasible region for DUE when the effective delay operators are known is

$$\Lambda_0 = \left\{ h \geq 0 : \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} h_p(t) dt = Q_{ij} \quad \forall (i, j) \in \mathcal{W} \right\} \subseteq (L_+^2[t_0, t_f])^{|\mathcal{P}|} \quad (2.4)$$

In order to define an appropriate concept of minimum travel costs in the present context, we require the measure-theoretic analog of the infimum of a set of numbers. In particular, for any measurable function $g : [t_0, t_f] \rightarrow \mathbb{R}$, the *essential infimum* of $g(\cdot)$ on $[t_0, t_f]$ is given by

$$\text{essinf}\{g(s) : s \in [t_0, t_f]\} \doteq \sup\{x \in \mathbb{R} : \nu\{s \in [t_0, t_f] : g(s) < x\} = 0\} \quad (2.5)$$

Note that for each $x > \text{essinf}\{g(s) : s \in [t_0, t_f]\}$ it must be true by definition that

$$\nu\{s \in [t_0, t_f] : f(s) < x\} > 0$$

Let us define the essential infimum of effective travel delays, which depend on the path flows h :

$$v_p(h) = \text{essinf}\{\Psi_p(t, h) : t \in [t_0, t_f]\} > 0 \quad \forall p \in \mathcal{P} \quad (2.6)$$

$$v_{ij}(h) = \min\{v_p(h) : p \in \mathcal{P}_{ij}\} \quad \forall (i, j) \in \mathcal{W} \quad (2.7)$$

The following definition of dynamic user equilibrium is first articulated by Friesz et al. (1993):

Definition 2.1. (Dynamic user equilibrium) *A vector of departure rates (path flows) $h^* \in \Lambda_0$ is a dynamic user equilibrium if*

$$h_p^*(t) > 0, \quad p \in \mathcal{P}_{ij} \implies \Psi_p(t, h^*) = v_{ij}(h^*) \quad \forall_\nu(t) \in [t_0, t_f] \quad (2.8)$$

We denote this equilibrium by $DUE(\Psi, \Lambda_0, [t_0, t_f])$.

Using measure-theoretic arguments, Friesz et al. (1993) establish that a dynamic user equilibrium is equivalent to the following variational inequality under suitable regularity conditions:

$$\left. \begin{array}{l} \text{find } h^* \in \Lambda_0 \text{ such that} \\ \sum_{p \in \mathcal{P}} \int_{t_0}^{t_f} \Psi_p(t, h^*)(h_p - h_p^*) dt \geq 0 \\ \forall h \in \Lambda_0 \end{array} \right\} VI(\Psi, \Lambda_0, [t_0, t_f]) \quad (2.9)$$

3 Dynamic User Equilibrium with Elastic Demand (E-DUE)

The general setup of DUE with elastic demand is similar to that of the fixed demand case, with the exception that the total travel demand Q_{ij} between an origin-destination (OD) pair $(i, j) \in \mathcal{W}$ is no longer a prescribed constant. Rather, transportation demand is assumed to be expressed as the following invertible function

$$Q_{ij} = F_{ij}[v]$$

for each origin-destination pair $(i, j) \in \mathcal{W}$, where $\mathcal{W}$ is the set of all origin-destination pairs and v is a concatenation of origin-destination minimum travel cost v_{ij} associated with $(i, j) \in \mathcal{W}$. That is, we have that

$$v_{ij} \in \mathbb{R}_{++}, \quad v = (v_{ij} : (i, j) \in \mathcal{W}) \in \mathbb{R}_{++}^{|\mathcal{W}|}$$

Note that to say v_{ij} is a minimum travel cost means it is the minimum cost for all departure time choices and all route choices pertinent to origin-destination pair $(i, j) \in \mathcal{W}$. Further note that Q_{ij} is the unknown cumulative travel demand between $(i, j) \in \mathcal{W}$ that must ultimately arrive by time t_f .

We will also find it convenient to form the complete vector of travel demands by concatenating the OD-specific travel demands to obtain

$$Q = (Q_{ij} : (i, j) \in \mathcal{W}) \in \mathbb{R}_+^{|\mathcal{W}|}$$

The inverse demand function for every $(i, j) \in \mathcal{W}$ is

$$v_{ij} = \Theta_{ij}[Q]$$

and we naturally define

$$\Theta = (\Theta_{ij} : (i, j) \in \mathcal{W}) \in \mathfrak{R}_{++}^{|\mathcal{W}|}$$

As a consequence, we employ the following feasible set of departure flows when the travel demand between each origin-destination pair is unknown.

$$\tilde{\Lambda} = \left\{ (h, Q) : h \geq 0, \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} h_p(t) dt = Q_{ij} \quad \forall (i, j) \in \mathcal{W} \right\} \subset (L^2[t_0, t_f])^{|\mathcal{P}|} \times \mathfrak{R}^{|\mathcal{W}|} \quad (3.10)$$

where $(L^2[t_0, t_f])^{|\mathcal{P}|} \times \mathfrak{R}^{|\mathcal{W}|}$ is the direct product of the $|\mathcal{P}|$ -fold product of Hilbert spaces consisting of square-integrable path flows, and the $|\mathcal{W}|$ -dimensional Euclidean space consisting of vectors of elastic travel demands.

With preceding preparation, we are in a place where the simultaneous route-and-departure-choice dynamic user equilibrium with elastic demand can be rigorously defined, as follows.

Definition 3.1. (Dynamic user equilibrium with elastic demand) A pair $(h^*, Q^*) \in \tilde{\Lambda}$, where h^* is a vector of departure rates (path flows) and Q^* is the associated vector of travel demands, is said to be a dynamic user equilibrium with elastic demand if for all $(i, j) \in \mathcal{W}$,

$$h_p^*(t) > 0, \quad p \in \mathcal{P}_{ij} \implies \Psi_p(t, h^*) = \Theta_{ij}[Q^*] \quad \forall \nu(t) \in [t_0, t_f] \quad (3.11)$$

$$\Psi_p(t, h^*) \geq \Theta_{ij}[Q^*] \quad \forall \nu(t) \in [t_0, t_f], \quad \forall p \in \mathcal{P}_{ij} \quad (3.12)$$

3.1 The Differential Variational Inequality Formulation of E-DUE

This section is a close recap of the differential variational inequality (DVI) formulation of E-DUE problem proposed by Friesz and Meimand (2013). The notion of dynamic user equilibrium can be alternatively illustrated and analyzed using the mathematical paradigm of DVI (Pang and Stewart, 2008). In particular, as noted by Friesz et al. (2011), the demand satisfaction constraints in the presence of fixed demand can be easily rewritten as a two-point boundary value problem

$$\frac{dy_{ij}}{dt} = \sum_{p \in \mathcal{P}_{ij}} h_p(t), \quad y_{ij}(t_0) = 0, \quad y_{ij}(t_f) = Q_{ij} \quad \forall (i, j) \in \mathcal{W}$$

where $y_{ij}(t)$ is interpreted as the cumulative departure associated with each origin-destination pair $(i, j) \in \mathcal{W}$ by time $t \in [t_0, t_f]$. In the elastic demand case, we assume there are unknown terminal states $y_{ij}(t_f)$ for all $(i, j) \in \mathcal{W}$, which are the realized DUE travel demands. Moreover, for each origin-destination pair $(i, j) \in \mathcal{W}$, inverse travel demand is expressed as

$$v_{ij} = \Theta_{ij}[y(t_f)] \quad (3.13)$$

where

$$y = (y_{ij}(\cdot) : (i, j) \in \mathcal{W}) \in (\mathcal{H}^1[t_0, t_f])^{|\mathcal{W}|}$$

$\mathcal{H}^1([t_0, t_f])$ is the Sobolev space consisting of weakly differentiable functions whose weak derivatives are square-integrable. Thus, the $y_{ij}(t_f)$, for all $(i, j) \in \mathcal{W}$, will be determined endogenously to the differential variational inequality presented subsequently in Theorem 3.2. Such an approach contrasts to the approach employed by Friesz et al. (2011) to study fixed-demand DUE by making each $y_{ij}(t_f)$ an *a priori* fixed constant Q_{ij} . Accordingly, we introduce the following dynamics:

$$\frac{dy_{ij}}{dt} = \sum_{p \in \mathcal{P}_{ij}} h_p, \quad y_{ij}(t_0) = 0 \quad \forall (i, j) \in \mathcal{W} \quad (3.14)$$

Notice that (3.14) is an initial value problem without terminal constraints. As a consequence, we employ the following alternative form of the feasible set:

$$\Lambda_1 = \left\{ h \geq 0 : \frac{dy_{ij}}{dt} = \sum_{p \in \mathcal{P}_{ij}} h_p(t), \quad y_{ij}(t_0) = 0 \quad \forall (i, j) \in \mathcal{W} \right\} \subset (L_+^2[t_0, t_f])^{|\mathcal{P}|} \quad (3.15)$$

Note that the feasible set Λ_1 in (3.15) is expressed as a set of path flows since knowledge of h completely determines the state variables y_{ij} , $(i, j) \in \mathcal{W}$, that satisfy the initial value problem (3.14).

Theorem 3.2. (E-DUE equivalent to a differential variational inequality) *Assume $\Psi_p(\cdot, h) : [t_0, t_f] \rightarrow \mathbb{R}_{++}$ is measurable and strictly positive for all $p \in \mathcal{P}$ and all $h \in \Lambda_1$. Also assume that the elastic travel demand function is invertible, with inverse $\Theta_{ij}[Q]$ for all $(i, j) \in \mathcal{W}$. A vector of departure rates (path flows) $h^* \in \Lambda_1$ is a dynamic user equilibrium with associated demand $y_{ij}^*(t_f)$ if and only if h^* solves the following DVI($\Psi, \Theta, [t_0, t_f]$).*

$$\left. \begin{aligned} & \text{find } h^* \in \Lambda_1 \text{ such that } \forall h \in \Lambda_1, \\ & \sum_{p \in \mathcal{P}} \int_{t_0}^{t_f} \Psi_p(t, h^*)(h_p - h_p^*) dt - \sum_{(i,j) \in \mathcal{W}} \Theta_{ij}[y^*(t_f)](y_{ij}(t_f) - y_{ij}^*(t_f)) \geq 0 \end{aligned} \right\} \text{DVI}(\Psi, \Theta, [t_0, t_f]) \quad (3.16)$$

Proof. See Friesz and Meimand (2013). $\square$

3.2 The fixed-point-problem reformulation of E-DUE

In this section, we present and prove a fixed-point-problem (FPP) reformulation of E-DUE. Such a result is new in the literature and allows an iterative computational scheme to be devised based on the FPP.

Since the differential variational inequality problem (3.16) has both infinite-dimensional and finite-dimensional terms, it is convenient for us to analyze this problem within an extended space that contains both $(L^2[t_0, t_f])^{|\mathcal{P}|}$ and $\mathbb{R}^{|\mathcal{W}|}$ as embedded subspaces. Therefore, we are prompted to define the product space $E \doteq (L^2[t_0, t_f])^{|\mathcal{P}|} \times \mathbb{R}^{|\mathcal{W}|}$ which is a Hilbert space with the inherited inner product defined as

$$\begin{aligned} \langle X, Y \rangle_E & \doteq \sum_{i=1}^{|\mathcal{P}|} \int_{t_0}^{t_f} \xi_i(t) \cdot \eta_i(t) dt + \sum_{j=1}^{|\mathcal{W}|} u_j v_j \\ X & = (\xi_1(\cdot), \dots, \xi_{|\mathcal{P}|}(\cdot), u_1, \dots, u_{|\mathcal{W}|}) \in E \\ Y & = (\eta_1(\cdot), \dots, \eta_{|\mathcal{P}|}(\cdot), v_1, \dots, v_{|\mathcal{W}|}) \in E \end{aligned} \quad (3.17)$$

We also define the norm on the space E :

$$\|X\|_E \doteq \langle X, X \rangle_E^{1/2}$$

Note that the elastic demand satisfaction conveyed by (3.10) can be trivially re-written as a two-point boundary problem, leading to the following alternative definition of the feasible set in the extended space E :

$$\begin{aligned} \tilde{\Lambda}_0 = \left\{ (h, Q) \in (L_+^2[t_0, t_f])^{|\mathcal{P}|} \times \mathbb{R}_+^{|\mathcal{W}|} : \frac{dy_{ij}}{dt} = \sum_{p \in \mathcal{P}_{ij}} h_p(t), \right. \\ \left. y_{ij}(t_0) = 0, \quad y_{ij}(t_f) = Q_{ij} \quad \forall (i, j) \in \mathcal{W} \right\} \subset E \quad (3.18) \end{aligned}$$

Recalling the inverse demand function $\Theta = (\Theta_{ij} : (i, j) \in \mathcal{W})$, we introduce the notation

$$\Theta^- \doteq (-\Theta_{ij} : (i, j) \in \mathcal{W}) : \quad \mathbb{R}_+^{|\mathcal{W}|} \longrightarrow \mathbb{R}_{--}^{|\mathcal{W}|}$$

We also define the mapping

$$\mathcal{F} : \tilde{\Lambda}_0 \longrightarrow E, \quad (h, Q) \mapsto (\Psi(\cdot, h), \Theta^-(Q)) \quad (3.19)$$

where $(h, Q) \in \tilde{\Lambda}_0$, $\Psi(\cdot, h) \in (L_+^2[t_0, t_f])^{|\mathcal{W}|}$, and $\Theta^-(Q) \in \mathbb{R}_{--}^{|\mathcal{W}|}$. Such a mapping is clearly well-defined. With the preceding discussion, we are now ready to present and prove the main theorem in this section.

Theorem 3.3. (E-DUE equivalent to a fixed-point problem) *The fixed point problem*

$$X^* = P_{\tilde{\Lambda}_0}[X^* - \alpha \mathcal{F}(X^*)] \quad (3.20)$$

is equivalent to the E-DUE problem, where $X^* = (h^*, Q^*) \in (L_+^2[t_0, t_f])^{|\mathcal{P}|} \times \mathbb{R}_+^{|\mathcal{W}|}$, and $P_{\tilde{\Lambda}_0}[\cdot]$ is the minimum norm projection onto $\tilde{\Lambda}_0$. $\alpha \in \mathbb{R}_{++}$ is a fixed constant.

Proof. The fixed-point problem (3.20) requires that

$$X^* = \arg \min_X \left\{ \frac{1}{2} \|X^* - \alpha \mathcal{F}(X^*) - X\|_E^2 : X \in \tilde{\Lambda}_0 \right\} \quad (3.21)$$

The right hand side of (3.21) amounts to the following optimal control problem when X^* is given:

$$\begin{aligned} \min_{X=(h, y(t_f))} J(X) = \int_{t_0}^{t_f} \frac{1}{2} \sum_{(i,j) \in \mathcal{W}} \sum_{p \in \mathcal{P}_{ij}} [h_p^*(t) - \alpha \Psi_p(t, h^*) - h_p(t)]^2 dt \\ + \frac{1}{2} \sum_{(i,j) \in \mathcal{W}} \left(y_{ij}^*(t_f) - \alpha \Theta_{ij}^-[y^*(t_f)] - y_{ij}(t_f) \right)^2 \quad (3.22) \end{aligned}$$

subject to

$$\frac{dy_{ij}}{dt} = \sum_{p \in \mathcal{P}_{ij}} h_p(t) \quad \forall (i, j) \in \mathcal{W} \quad (3.23)$$

$$y_{ij}(t_0) = 0 \quad \forall (i, j) \in \mathcal{W} \quad (3.24)$$

$$h \geq 0 \quad (3.25)$$

The Hamiltonian for the above optimal control problem is

$$H = \frac{1}{2} \sum_{(i,j) \in \mathcal{W}} \sum_{p \in \mathcal{P}_{ij}} [h_p^*(t) - \alpha \Psi_p(t, h^*) - h_p(t)]^2 + \sum_{(i,j) \in \mathcal{W}} \lambda_{ij} \sum_{p \in \mathcal{P}_{ij}} h_p(t)$$

for which the adjoint equations are

$$\frac{d\lambda_{ij}}{dt} = - \frac{\partial H}{\partial y_{ij}} = 0 \quad \forall (i, j) \in \mathcal{W}, \quad p \in \mathcal{P}_{ij}, \quad t \in [t_0, t_f] \quad (3.26)$$

and the transversality conditions read: for all $(i, j) \in \mathcal{W}$,

$$\lambda_{ij}(t_f) = \frac{1}{2} \frac{\partial \sum_{(i,j) \in \mathcal{W}} \left(y_{ij}^*(t_f) - \alpha \Theta_{ij}^- [y^*(t_f)] - y_{ij}(t_f) \right)^2}{\partial y_{ij}(t_f)} = -y_{ij}^*(t_f) + \alpha \Theta_{ij}^- [y^*(t_f)] + y_{ij}(t_f) \quad (3.27)$$

By the minimum principle, we enforce the following minimization problem

$$\min_h H \quad \text{s.t.} \quad -h \leq 0$$

for which the Kuhn-Tucker conditions are (we denote the K-T point by h^{**})

$$- [h_p^*(t) - \alpha \Psi_p(t, h^*) - h_p^{**}(t)] + \lambda_{ij} = \rho_p \quad \forall (i, j) \in \mathcal{W}, \quad p \in \mathcal{P}_{ij} \quad (3.28)$$

$$\rho_p h_p^{**} = 0 \quad \forall (i, j) \in \mathcal{W}, \quad p \in \mathcal{P}_{ij} \quad (3.29)$$

$$\rho_p \geq 0 \quad \forall (i, j) \in \mathcal{W}, \quad p \in \mathcal{P}_{ij} \quad (3.30)$$

By virtue of (3.20), we have $h^* = h^{**}$. Equation (3.26) and (3.27) then imply $\lambda_{ij} \equiv \alpha \Theta_{ij}^- [y^*(t_f)]$. Therefore, we may re-state (3.28) as

$$\alpha \Psi_p(t, h^*) + \alpha \Theta_{ij}^- [y_{ij}^*(t_f)] = \rho_p \quad \forall (i, j) \in \mathcal{W}, \quad p \in \mathcal{P}_{ij}$$

Consequently, recalling $\Theta^- \doteq -\Theta$, we have by (3.29) that

$$h_p^*(t) > 0 \implies \rho_p = 0 \implies \Psi_p(t, h^*) = \Theta_{ij} [y_{ij}^*(t_f)] \quad \forall t \in [t_0, t_f], \quad p \in \mathcal{P}_{ij} \quad (3.31)$$

$$\Psi_p(t, h^*) - \Theta_{ij} [y_{ij}^*(t_f)] = \frac{\rho_p}{\alpha} \geq 0 \quad \forall t \in [t_0, t_f], \quad p \in \mathcal{P}_{ij} \quad (3.32)$$

which are recognized as conditions describing a DUE with elastic demand. $\square$

3.3 The Fixed-Point Algorithm for Computing E-DUE

Naturally Theorem 3.3 suggests the algorithm

$$X^{k+1} = P_{\tilde{\Lambda}_0} [X^k - \alpha \mathcal{F}(X^k)]$$

That is, at the k -th iteration, we need to solve the following

$$X^{k+1} = \arg \min_X \left\{ \frac{1}{2} \|X^k - \alpha \mathcal{F}(X^k) - X\|^2 : X \in \tilde{\Lambda}_0 \right\} \quad (3.33)$$

which is recognized as a linear-quadratic optimal control problem

$$\begin{aligned} X^{k+1} = \left(h^{k+1}, y^{k+1}(t_f) \right) &= \arg \min_X \int_{t_0}^{t_f} \frac{1}{2} \sum_{(i,j) \in \mathcal{W}} \sum_{p \in \mathcal{P}_{ij}} \left[h_p^k(t) - \alpha \Psi_p(t, h^k) - h_p(t) \right]^2 dt \\ &\quad + \frac{1}{2} \sum_{(i,j) \in \mathcal{W}} \left(y_{ij}^k(t_f) - \alpha \Theta_{ij}^- [y^k(t_f)] - y_{ij}(t_f) \right)^2 \end{aligned} \quad (3.34)$$

subject to

$$\frac{dy_{ij}}{dt} = \sum_{p \in \mathcal{P}_{ij}} h_p(t) \quad \forall (i, j) \in \mathcal{W} \quad (3.35)$$

$$y_{ij}(t_0) = 0 \quad \forall (i, j) \in \mathcal{W} \quad (3.36)$$

$$h \geq 0 \quad (3.37)$$

As we have already explained in the proof of Theorem 3.3, the optimality conditions for system (3.33)-(3.38) are:

$$\lambda_{ij} \equiv -y_{ij}^k(t_f) + \alpha \Theta_{ij}^- [y^k(t_f)] + y_{ij}^{k+1}(t_f) \quad \forall (i, j) \in \mathcal{W} \quad (3.38)$$

$$\begin{aligned} 0 &\leq h_p^{k+1}(t) \\ &= \arg \left\{ \frac{\partial H^k}{\partial h_p} = 0 \right\} \\ &= \arg \left\{ - \left(h_p^k(t) - \alpha \Psi_p(t, h^k) - h_p(t) \right) + \lambda_{ij} = 0 \right\} \\ &= \arg \left\{ - \left(h_p^k(t) - \alpha \Psi_p(t, h^k) - h_p(t) \right) - y_{ij}^k(t_f) + \alpha \Theta_{ij}^- [y^k(t_f)] + y_{ij}^{k+1}(t_f) = 0 \right\} \end{aligned} \quad (3.39)$$

In other words, given $(i, j) \in \mathcal{W}$ and $p \in \mathcal{P}_{ij}$, $h_p^{k+1}(\cdot)$ is determined as

$$\begin{aligned} h_p^{k+1}(t) &= \left[h_p^k - \alpha \Psi_p(t, h^k) + y_{ij}^k(t_f) - \alpha \Theta_{ij}^- [y^k(t_f)] - y_{ij}^{k+1}(t_f) \right]_+ \\ &= \left[h_p^k(t) - \alpha \Psi_p(t, h^k) + Q_{ij}^k + \alpha \Theta_{ij} [Q^k] - Q_{ij}^{k+1} \right]_+ \end{aligned} \quad (3.40)$$

where

$$Q_{ij}^k \equiv y_{ij}^k(t_f) = \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} h_p^k(t) dt \quad \forall (i, j) \in \mathcal{W}$$

Notice that for all $(i, j) \in \mathcal{W}$, Q_{ij}^{k+1} must satisfy

$$\begin{aligned} Q_{ij}^{k+1} &= \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} h_p^{k+1}(t) dt \\ &= \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} \left[h_p^k(t) - \alpha \Psi_p(t, h^k) + Q_{ij}^k + \alpha \Theta_{ij} [Q^k] - Q_{ij}^{k+1} \right]_+ dt \end{aligned} \quad (3.41)$$

Equation (3.41) is viewed as a nonlinear equation with the unknown variable Q_{ij}^{k+1} . The next lemma ensures that such equation always admits a unique solution.

Lemma 3.4. *Given any $h_p^k(\cdot) \geq 0$, $\Psi_p(\cdot, h^k) > 0$, $Q_{ij}^k \geq 0$, $\Theta_{ij}[Q^k] > 0$ and $\alpha > 0$, there exists a unique $Q_{ij}^{k+1} \in \mathbb{R}_+$ that satisfies the following equation*

$$\sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} \left[h_p^k(t) - \alpha \Psi_p(t, h^k) + Q_{ij}^k + \alpha \Theta_{ij}[Q^k] - Q_{ij}^{k+1} \right]_+ dt - Q_{ij}^{k+1} = 0 \quad (3.42)$$

Proof. We consider two cases.

(i) $h_p^k(t) - \alpha \Psi_p(t, h^k) + Q_{ij}^k + \alpha \Theta_{ij}[Q^k] \leq 0 \quad \forall t \in [t_0, t_f], \forall p \in \mathcal{P}_{ij}$. Then clearly $Q_{ij}^{k+1} = 0$ is a solution to (3.42)

(ii) $h_p^k(t) - \alpha \Psi_p(t, h^k) + Q_{ij}^k + \alpha \Theta_{ij}[Q^k] > 0$ for some $p \in \mathcal{P}_{ij}$ and for $t \in \mathcal{B} \subset [t_0, t_f]$ where $\mathcal{B}$ is a set with positive measure. We call the left hand side of (3.42) $f(Q_{ij}^{k+1})$, which is a continuous function of Q_{ij}^{k+1} . According to our hypothesis, the following hold

$$f(0) > 0, \quad f(Q_{ij}^{k+1}) < 0 \quad \text{if } Q_{ij}^{k+1} \gg 1$$

where the notation $\gg 1$ means ‘significantly large’. Therefore, by the Intermediate Value Theorem, there must exist at least one value of Q_{ij}^{k+1} such that $f(Q_{ij}^{k+1})$ vanishes.

The uniqueness of such a solution follows by observing that $f(\cdot)$, as a function of Q_{ij}^{k+1} , is strictly decreasing. $\square$

Lemma (3.4) suggests that one can conduct a simple root-search procedure to find the value of Q_{ij}^{k+1} that satisfies (3.41). With preceding discussion, we can now state the algorithm for computing DUE with elastic demand.

The Fixed-Point Algorithm for E-DUE

Step 0. Initialization. Identify an initial feasible solution $(h^0, Q^0) \in \tilde{\Lambda}_0$ and set iteration counter $k = 0$.

Step 1. Find the effective path delay. Solve the dynamic network loading problem with path flows given by h^k , and obtain the effective path delays $\Psi_p(\cdot, h^k)$, $\forall p \in \mathcal{P}$.

Step 2. Update the trip matrix. For each $(i, j) \in \mathcal{W}$, solve the following equation for Q_{ij}^{k+1} , using root-search algorithms.

$$\sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} \left[h_p^k(t) - \alpha \Psi_p(t, h^k) + Q_{ij}^k + \alpha \Theta_{ij}[Q^k] - Q_{ij}^{k+1} \right]_+ dt - Q_{ij}^{k+1} = 0$$

Step 3. Update path flows. For each $(i, j) \in \mathcal{W}$ and $p \in \mathcal{P}_{ij}$, update the path flows as

$$h_p^{k+1}(t) = \left[h_p^k(t) - \alpha \Psi_p(t, h^k) + Q_{ij}^k + \alpha \Theta_{ij}[Q^k] - Q_{ij}^{k+1} \right]_+ \quad \forall t \in [t_0, t_f]$$

Step 4. Check for convergence. Terminate the algorithm with output $X^* \approx (h^k, Q^k)$ if

$$\frac{\|(h^{k+1}, Q^{k+1}) - (h^k, Q^k)\|_E}{\|(h^k, Q^k)\|_E} \leq \epsilon$$

where $\epsilon \in \mathfrak{R}_{++}$ is a prescribed constant, and

$$\|(h, Q)\|_E \doteq \left(\sum_{p \in \mathcal{P}} \int_{t_0}^{t_f} h_p^2(t) dt + \sum_{(i,j) \in \mathcal{W}} Q_{ij}^2 \right)^{1/2}$$

is the induced norm on the product space $E = (L^2[t_0, t_f])^{|\mathcal{P}|} \times \mathfrak{R}^{|\mathcal{W}|}$. Otherwise, set $k = k + 1$ and repeat Step 1 through Step 4.

4 Bounded Rationality Dynamic User Equilibrium

The notion of bounded rationality (BR) is a relaxation of the dynamic extension of Wardrop's first principle (Wardrop, 1952). The Wardropian principle enforces equal travel costs among all utilized route and departure time choices between an origin-destination pair. The bounded rationality dynamic user equilibrium (BR-DUE), on the other hand, requires that the experience travel cost, including early and late arrival penalties, are within the interval $[v_{ij}(h), v_{ij}(h) + \epsilon_{ij}]$. Here $v_{ij}(h)$ is the essential infimum of the effective delays between origin-destination pair (i, j) . Notice that such infimum depends on the complete path flow vector h . $\epsilon_{ij} \in \mathfrak{R}_+$ is a prescribed constant describing acceptable differences in travel costs experienced by travelers between origin-destination pair (i, j) .

In this paper, we present both variational inequality (VI) and differential variational inequality (DVI) formulations of the continuous-time BR-DUE problem, when both route choice and departure time choice are employed. These formulations are original in the existing literature. Moreover, the VI formulation provides a natural framework in which existence of BR-DUE can be analyzed by means of Brouwer's fixed point theorem; see Browder (1968) and Han et al. (2013c) for more detailed discussion.¹ The DVI formulation, on the other hand, allows the still emerging theory of differential variational inequalities to be employed for the analysis and computation of solutions of the BR-DUE problems.

Throughout this section, the travel demand Q_{ij} between each origin-destination pair (i, j) is assumed to be a fixed constant. We begin with articulating the notion of bounded rationality in a measure-theoretic context. Recall from Section 2 that the effective delay operator Ψ maps each vector of path flows $h \in \Lambda_0$ to a vector of effective path delays, that is,

$$\Psi(\cdot, h) \equiv (\Psi_p(\cdot, h) : p \in \mathcal{P}), \quad \Psi_p(\cdot, h) : [t_0, t_f] \rightarrow \mathfrak{R}_{++} \quad \forall p \in \mathcal{P}$$

The set of feasible path flows, as we recall, is

$$\Lambda_0 = \left\{ h \geq 0 : \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} h_p(t) dt = Q_{ij} \quad \forall (i, j) \in \mathcal{W} \right\} \subset (L_+^2[t_0, t_f])^{|\mathcal{P}|} \quad (4.43)$$

The following definition of simultaneous route-and-departure choice BR-DUE is an extension of the static BRUE studied in the current literature:

Definition 4.1. (BR-DUE) *Given $\epsilon = (\epsilon_{ij} : (i, j) \in \mathcal{W}) \in \mathfrak{R}_+^{|\mathcal{W}|}$, a vector of departure rates $h^* \in \Lambda_0$ is a bounded rationality dynamic user equilibrium associated with the vector of tolerances ϵ if for all $(i, j) \in \mathcal{W}$,*

$$h_p^*(t) > 0, \quad p \in \mathcal{P}_{ij} \implies \Psi_p(t, h^*) \in [v_{ij}(h^*), v_{ij}(h^*) + \epsilon_{ij}] \quad \forall \nu(t) \in [t_0, t_f] \quad (4.44)$$

¹When we refer to the existence of BR-DUE, we are mainly concerned with solutions other than the dynamic user equilibrium in the sense of Friesz et al. (1993).

where $v_{ij}(h^*)$ is the essential infimum of the effective path delays between origin-destination pair (i, j) . We denote this equilibrium by $BR-DUE(\Psi, \varepsilon, \Lambda_0, [t_0, t_f])$.

4.1 The Variational Inequality Formulation of BR-DUE

Essential to the variational inequality formulation of BR-DUE is the following operator:

$$\Phi^\varepsilon : (L_+^2[t_0, t_f])^{|\mathcal{P}|} \rightarrow (L_+^2[t_0, t_f])^{|\mathcal{P}|}, \quad h \mapsto (\Phi_p^\varepsilon(\cdot, h) : p \in \mathcal{P}) \quad (4.45)$$

where

$$\Phi_p^\varepsilon(t, h) = \max \{ \Psi_p(t, h), v_{ij}(h) + \varepsilon_{ij} \} \quad \forall p \in \mathcal{P}_{ij} \quad (4.46)$$

Given any vector of path flows $h \in \Lambda_0$, the effective path delays $\Psi_p(t, h)$, $p \in \mathcal{P}$ and the minimum effective delays v_{ij} , $(i, j) \in \mathcal{W}$ are uniquely determined by the dynamic network loading (DNL) procedure. Thus the operator Φ^ε stated above is well-defined and strictly positive. We indicate the dependence of such an operator on the prescribed tolerance ε by a superscript.

The next theorem casts the $BR-DUE(\Psi, \varepsilon, \Lambda_0, [t_0, t_f])$ problem as an infinite-dimensional variational inequality problem.

Theorem 4.2. (BR-DUE equivalent to a variational inequality) *Given $\varepsilon \in \mathbb{R}_+^{|\mathcal{W}|}$, let $\Phi_p^\varepsilon(\cdot, h) : [t_0, t_f] \rightarrow \mathbb{R}_{++}$ be measurable and strictly positive for all $p \in \mathcal{P}$ and all $h \in \Lambda_0$. Then a vector $h^* \in \Lambda_0$ represents a $BR-DUE(\Psi, \varepsilon, \Lambda_0, [t_0, t_f])$ if and only if it solves the following variational inequality*

$$\left. \begin{aligned} & \text{find } h^* \in \Lambda_0 \text{ such that} \\ & \sum_{p \in \mathcal{P}} \int_{t_0}^{t_f} \Phi_p^\varepsilon(t, h^*) (h_p - h_p^*) dt \geq 0 \\ & \forall h \in \Lambda_0 \end{aligned} \right\} VI(\Phi^\varepsilon, \Lambda_0, [t_0, t_f]) \quad (4.47)$$

Proof. (i)[Necessity] Let $h^* \in \Lambda$ correspond to a BR-DUE solution, then for any $h \in \Lambda$ and any $(i, j) \in \mathcal{W}$,

$$\begin{aligned} \sum_{(i,j) \in \mathcal{W}} \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} \Phi_p^\varepsilon(t, h^*) h_p dt &\geq \sum_{(i,j) \in \mathcal{W}} \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} \mu_{ij}^\varepsilon(h^*) h_p dt \\ &= \sum_{(i,j) \in \mathcal{W}} \mu_{ij}^\varepsilon(h^*) \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} h_p(t) dt = \sum_{(i,j) \in \mathcal{W}} \mu_{ij}^\varepsilon(h^*) Q_{ij} \end{aligned} \quad (4.48)$$

where

$$\mu_{ij}^\varepsilon(h^*) \doteq \min \{ \mu_p^\varepsilon(h^*) : p \in \mathcal{P}_{ij} \}$$

and

$$\mu_p^\varepsilon(h^*) \doteq \text{essinf} \{ \Phi_p^\varepsilon(t, h^*) : t \in [t_0, t_f] \}$$

It is easy to deduce that $\mu_{ij}^\varepsilon(h^*) = v_{ij}(h^*) + \varepsilon_{ij}$. On the other hand, with (4.44) and (4.46), we perform the following calculation:

$$\begin{aligned} \sum_{(i,j) \in \mathcal{W}} \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} \Phi_p^\varepsilon(t, h^*) h_p^* dt &= \sum_{(i,j) \in \mathcal{W}} \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} (v_{ij}(h^*) + \varepsilon_{ij}) h_p^* dt \\ &= \sum_{(i,j) \in \mathcal{W}} (v_{ij}(h^*) + \varepsilon_{ij}) Q_{ij} = \sum_{(i,j) \in \mathcal{W}} \mu_{ij}^\varepsilon(h^*) Q_{ij} \end{aligned} \quad (4.49)$$

In view of (4.48) and (4.49), we have

$$\sum_{(i,j) \in \mathcal{W}} \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} \Phi_p^\varepsilon(t, h^*) h_p^* dt \leq \sum_{(i,j) \in \mathcal{W}} \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} \Phi_p^\varepsilon(t, h^*) h_p dt \quad \forall h \in \Lambda$$

which is recognized as the variational inequality (4.47).

(ii)[Sufficiency] Let $h^* \in \Lambda_0$ be a solution of $VI(\Phi^\varepsilon, \Lambda_0, [t_0, t_f])$. Given that $\Phi^\varepsilon : (L_+^2[t_0, t_f])^{|\mathcal{P}|} \rightarrow (L_+^2[t_0, t_f])^{|\mathcal{P}|}$ is measurable and strictly positive, we employ the same proof of Theorem 2 in Friesz et al. (1993) to demonstrate that h^* satisfies

$$h_p^*(t) > 0, p \in \mathcal{P}_{ij} \implies \Phi_p^\varepsilon(t, h^*) = \mu_{ij}^\varepsilon(h^*) \quad \forall t \in [t_0, t_f], \quad \forall (i, j) \in \mathcal{W} \quad (4.50)$$

That is,

$$h_p^*(t) > 0, p \in \mathcal{P}_{ij} \implies v_{ij}(h^*) \leq \Psi_p^\varepsilon(t, h^*) \leq v_{ij}(h^*) + \varepsilon \quad \forall t \in [t_0, t_f], \quad \forall (i, j) \in \mathcal{W}$$

This concludes that h^* solves the BR-DUE problem. $\square$

Let us illustrate the meanings of $VI(\Psi, \Lambda_0, [t_0, t_f])$ (DUE) and $VI(\Phi^\varepsilon, \Lambda_0, [t_0, t_f])$ (BR-DUE) graphically. The following discussion is mathematically less rigorous but should provide an effective visualization of the problems of interest. Let us consider a network with just one link and one origin-destination pair. Figure 1 depicts a possible scenario of a DUE path flow $h_p^*(\cdot)$ and the associated effective path delay $\Psi_p(\cdot, h^*)$. It is intuitively clear that in order to minimize the following quantity over all h_p

$$\int_{t_0}^{t_f} \Psi_p(t, h^*) h_p dt, \quad (4.51)$$

the non-zero portion of $h_p^*(t)$ should be located at the “flat bottom” of the effective delay curve. Now let us turn to BR-DUE, which requires that whenever $h_p^*(t)$ is non-zero, $\Psi_p(t, h^*)$ must be within an indifference band with width ε . Clearly the upper boundary of such band is $v_{ij}(h^*) + \varepsilon$. Thus being a BR-DUE path flow requires that the non-zero portion must reside within the time interval $[a, b]$ (see Figure 2); i.e. the BR-DUE path flow maximizes

$$\int_{t_0}^{t_f} \Phi_p^\varepsilon(t, h^*) h_p dt \quad (4.52)$$

Theorem 4.2 presents a generic variational inequality that is equivalent to the BR-DUE problem. In comparison with the VI formulation $VI(\Psi, \Lambda_0, [t_0, t_f])$ of SRDC DUE (Friesz et

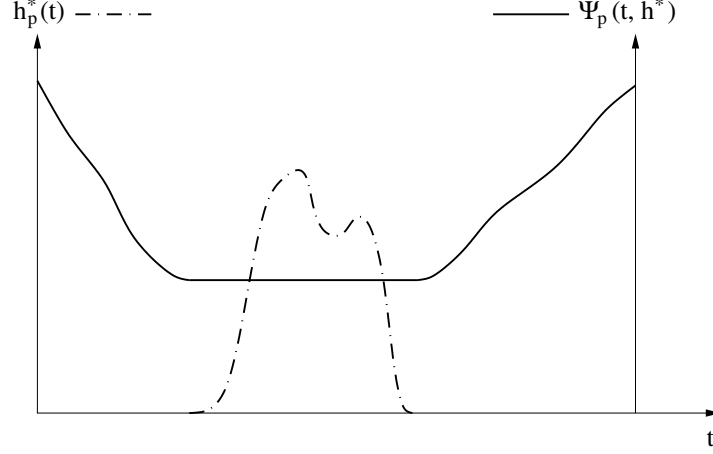


Figure 1: A possible scenario of a dynamic user equilibrium path flow $h_p^*(\cdot)$ and the associated effective path delay $\Psi_p(\cdot, h^*)$. In order to minimize the quantity (4.51) over all h_p , the equilibrium path flow h_p^* must be located at the “flat bottom” of the effective delay curve. Such observation also coincides with the definition of DUE.

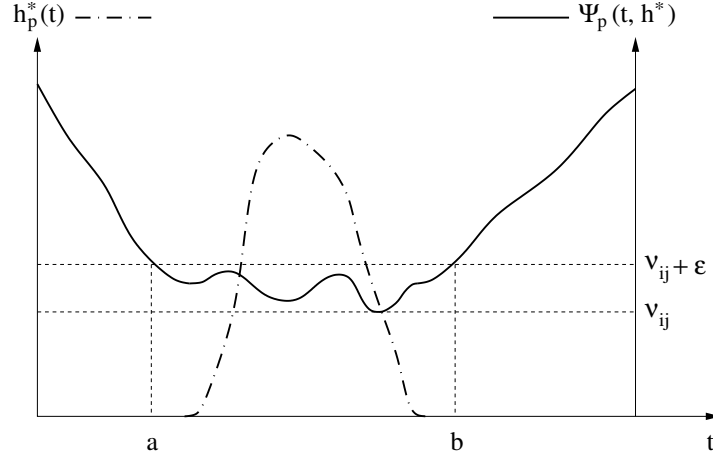


Figure 2: A possible scenario of a BR dynamic user equilibrium path flow $h_p^*(\cdot)$ and the associated effective path delay $\Psi_p(\cdot, h^*)$. To be a BR-DUE, h_p^* must vanish outside the time interval $[a, b]$, which implies that h_p^* is located at the “flat bottom” of the curve formed by the graph of $\Psi_p(\cdot, h^*)$ and the horizontal line $v_{ij} + \epsilon$. Such a curve is precisely the graph of $\Phi^\epsilon(\cdot, h^*)$. Therefore, the BR-DUE is an analogy of the DUE when the operator Ψ is replaced with Φ^ϵ .

al., 1993), the proposed variational inequality $VI(\Phi^\epsilon, \Lambda_0, [t_0, t_f])$ has a different principal operator Φ^ϵ , which encapsulates the dynamic network loading procedure as well as the tolerance vector ϵ . However, these two types of VIs do share a similar mathematical structure which allows known methodologies regarding SRDC DUE, conveyed by a series of papers (Friesz et al., 1993, 2001, 2013, 2011; Friesz and Mookherjee, 2006; Han et al., 2013c), to be transferred to BR-DUE problems. In fact, we are able to establish the differential variational inequality (DVI) formulation and the fixed-point algorithm for BR-DUE, as is demonstrated in the remainder of this section.

4.2 The Differential Variational Inequality Formulation of BR-DUE

Let us introduce the function $y_{ij}(\cdot) : [t_0, t_f] \rightarrow [0, Q_{ij}]$ for each origin-destination pair (i, j) ; $y_{ij}(t)$ represents the total traffic volume that have departed from origin i with the intent of reaching destination j . Note that the set of feasible path flows Λ_0 defined in (4.43) can be re-stated as

$$\Lambda_2 = \left\{ h \geq 0 : \frac{dy_{ij}}{dt} = \sum_{p \in \mathcal{P}_{ij}} h_p(t), \quad y_{ij}(t_0) = 0, \quad y_{ij}(t_f) = Q_{ij} \quad \forall (i, j) \in \mathcal{W} \right\} \quad (4.53)$$

As a result, we have the following useful theorem.

Theorem 4.3. (BR-DUE equivalent to a differential variational inequality) *Given $\varepsilon \in \mathbb{R}_+^{|\mathcal{W}|}$, assume $\Phi^\varepsilon(\cdot, h)$ is measurable and strictly positive for all $p \in \mathcal{P}$ and all $h \in \Lambda_2$. A vector of departure rates (path flows) $h^* \in \Lambda_2$ is a bounded rationality dynamic user equilibrium if and only if h^* solves the following differential variational inequality*

$$\left. \begin{aligned} & \text{find } h^* \in \Lambda_2 \text{ such that} \\ & \sum_{p \in \mathcal{P}} \int_{t_0}^{t_f} \Phi_p^\varepsilon(t, h^*)(h_p - h_p^*) dt \geq 0 \\ & \forall h \in \Lambda_2 \end{aligned} \right\} DVI(\Phi^\varepsilon, \Lambda_2, [t_0, t_f]) \quad (4.54)$$

Proof. (i)[Sufficiency] Given that $h^* \in \Lambda_2$ is a solution of the differential variational inequality $DVI(\Phi^\varepsilon, \Lambda_2, [t_0, t_f])$, we derive the following obvious relation:

$$\sum_{p \in \mathcal{P}} \int_{t_0}^{t_f} \Phi_p^\varepsilon(t, h^*) h_p^*(t) dt \leq \sum_{p \in \mathcal{P}} \int_{t_0}^{t_f} \Phi_p^\varepsilon(t, h^*) h_p(t) dt$$

for all $h \in \Lambda_2$. In other words, h^* is the solution of the optimal control problem:

$$\min J(h) = \sum_{(i,j) \in \mathcal{W}} \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} \Phi_p^\varepsilon(t, h^*) h_p(t) dt + \sum_{(i,j) \in \mathcal{W}} \mu_{ij} [Q_{ij} - y_{ij}(t_f)] \quad (4.55)$$

subject to

$$\frac{d}{dt} y_{ij}(t) = \sum_{p \in \mathcal{P}_{ij}} h_p(t) \quad \forall (i, j) \in \mathcal{W} \quad (4.56)$$

$$y_{ij}(t_0) = 0 \quad \forall (i, j) \in \mathcal{W} \quad (4.57)$$

$$h \geq 0 \quad (4.58)$$

where each μ_{ij} is the dual variable for the terminal conditions on $y_{ij}(\cdot)$, $(i, j) \in \mathcal{W}$. The Hamiltonian for problem (4.55)-(4.58) is

$$H = \sum_{(i,j) \in \mathcal{W}} \sum_{p \in \mathcal{P}_{ij}} \Phi_p^\varepsilon(t, h^*) h_p + \sum_{(i,j) \in \mathcal{W}} \lambda_{ij} \sum_{p \in \mathcal{P}_{ij}} h_p$$

where the adjoint dynamics are:

$$\frac{d}{dt} \lambda_{ij}(t) = - \frac{\partial H}{\partial y_{ij}} = 0 \quad \forall (i, j) \in \mathcal{W}, \quad t \in [t_0, t_f] \quad (4.59)$$

the transversality conditions read:

$$\lambda_{ij}(t_f) = \frac{\partial \sum_{(i,j) \in \mathcal{W}} \mu_{ij} [Q_{ij} - y_{ij}(t_f)]}{\partial y_{ij}(t_f)} = -\mu_{ij} \quad \forall (i, j) \in \mathcal{W}, \quad t \in [t_0, t_f] \quad (4.60)$$

Taken together, (4.59) and (4.60) imply that

$$\lambda_{ij}(t) \equiv -\mu_{ij} \quad \forall (i, j) \in \mathcal{W}, \quad \forall t \in [t_0, t_f] \quad (4.61)$$

According to the minimum principle, we have

$$h^* = \arg \min_h H \quad \text{such that} \quad -h \leq 0$$

for which the Kuhn-Tucker conditions are

$$\Phi_p^\varepsilon(t, h^*) + \lambda_{ij} = \rho_p \geq 0 \quad \forall p \in \mathcal{P}_{ij}, \quad \forall (i, j) \in \mathcal{W}, \quad \forall \nu(t) \in [t_0, t_f] \quad (4.62)$$

$$\rho_p(t) h_p^*(t) = 0 \quad \forall p \in \mathcal{P}_{ij}, \quad \forall (i, j) \in \mathcal{W}, \quad \forall \nu(t) \in [t_0, t_f] \quad (4.63)$$

$$\rho_p(t) \geq 0 \quad \forall p \in \mathcal{P}_{ij}, \quad \forall (i, j) \in \mathcal{W}, \quad \forall \nu(t) \in [t_0, t_f] \quad (4.64)$$

where ρ_p are dual variables for the non-negativity constraints. From (4.62) and (4.63) we have that for all $(i, j) \in \mathcal{W}$,

$$h_p^*(t) > 0, p \in \mathcal{P}_{ij} \implies \Phi_p^\varepsilon(t, h^*) = -\lambda_{ij} = \mu_{ij} \quad \forall \nu(t) \in [t_0, t_f] \quad (4.65)$$

$$\Phi_p^\varepsilon(t, h^*) = \rho_p - \lambda_{ij} = \rho_p + \mu_{ij} \geq \mu_{ij} \quad \forall \nu(t) \in [t_0, t_f] \quad (4.66)$$

from which we conclude that

$$\mu_{ij} = \text{essinf} \{ \Phi_p^\varepsilon(t, h^*) : t \in [t_0, t_f] \} \quad \forall (i, j) \in \mathcal{W}$$

In view of the definition of Φ_p^ε (4.46), we re-state (4.65) as

$$h_p^*(t) > 0, p \in \mathcal{P}_{ij} \implies \Psi(t, h^*) \leq v_{ij}(h^*) + \varepsilon_{ij} \quad \forall \nu(t) \in [t_0, t_f], \quad \forall (i, j) \in \mathcal{W}$$

which is recognized as conditions describing a dynamic user equilibrium with bounded rationality, where $v_{ij}(h^*)$ is the essential infimum of effective path delays between origin-destination (i, j) .

(ii)[Necessity] For each origin-destination pair $(i, j) \in \mathcal{W}$, define $\mu_{ij}^\varepsilon(h)$ to be the essential infimum of $\Phi_p^\varepsilon(\cdot, h)$ between (i, j) . It is then easy to verify that $\mu_{ij}^\varepsilon(h) = v_{ij}(h) + \varepsilon_{ij}$ for all $(i, j) \in \mathcal{W}$ and for all $h \in \Lambda_2$.

For a BR-DUE solution h^* we have for all $(i, j) \in \mathcal{W}$ that

$$h_p^*(t) > 0, p \in \mathcal{P}_{ij} \implies v_{ij}(h^*) \leq \Psi_p(t, h^*) \leq v_{ij}(h^*) + \varepsilon_{ij}$$

which translates to

$$h_p^*(t) > 0, p \in \mathcal{P}_{ij} \implies \Phi_p^\varepsilon(t, h^*) = \mu_{ij}^\varepsilon(h^*) \quad \forall (i, j) \in \mathcal{W}$$

Therefore, given any $h \in \Lambda_2$, we have

$$\begin{aligned}
\sum_{(i,j) \in \mathcal{W}} \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} \Phi_p^\varepsilon(t, h^*) h_p^*(t) dt &= \sum_{(i,j) \in \mathcal{W}} \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} \mu_{ij}^\varepsilon(h^*) h_p(t) dt \\
&= \sum_{(i,j) \in \mathcal{W}} \mu_{ij}^\varepsilon(h^*) \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} h_p^*(t) dt \\
&= \sum_{(i,j) \in \mathcal{W}} \mu_{ij}^\varepsilon(h^*) \cdot Q_{ij} \\
&= \sum_{(i,j) \in \mathcal{W}} \mu_{ij}^\varepsilon(h^*) \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} h_p(t) dt \\
&\leq \sum_{(i,j) \in \mathcal{W}} \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} \Phi_p^\varepsilon(t, h^*) h_p(t) dt
\end{aligned}$$

Therefore, $h^* \in \Lambda_2$ is a solution of the DVI (4.54). $\square$

4.3 The Fixed-point reformulation and algorithm

Not surprisingly, the BR-DUE also admits a fixed-point-problem reformulation provided the differential variational inequality established in Theorem 4.3.

Theorem 4.4. (Fixed point problem equivalent to BR-DUE) *Assume that $\Psi_p(\cdot, h)$ is measurable and strictly positive for all $p \in \mathcal{P}$ and $h \in \Lambda_2$. Then the fixed point problem*

$$h^* = P_{\Lambda_2} [h^* - \alpha \Phi^\varepsilon(t, h^*)] \quad (4.67)$$

is equivalent to DVI($\Phi^\varepsilon, \Lambda_2, [t_0, t_f]$) and hence to BR-DUE($\Psi, \varepsilon, \Lambda_0, [t_0, t_f]$), where $P_{\Lambda_2}[\cdot]$ is the minimum norm projection onto Λ_2 and $\alpha > 0$ is a fixed constant.

The proof of Theorem 4.4 follows closely that of the fixed-point reformulation of SRDC DUE provided by Friesz et al. (2011). The only difference is that the effective delay operator Ψ therein is now replaced with the newly defined Φ^ε . Thus we omit the proof from this paper. The purpose of invoking the DVI formulation and the fixed point problem formulation is to devise an iterative computational scheme. Namely, Theorem 4.4 suggests the algorithm

$$h^{k+1} = P_{\Lambda_2} [h^k - \alpha \Phi^\varepsilon(t, h^k)]$$

That is, at the k -th iteration, one needs to solve the following linear-quadratic optimal control problem

$$h^{k+1} = \arg \min_h \left\{ \frac{1}{2} \|h^k - \alpha \Phi^\varepsilon(t, h^k) - h\|^2 : h \in \Lambda_2 \right\}$$

That is, we seek the solution of the optimal control problem

$$\min_h J^k(h) = \sum_{(i,j) \in \mathcal{W}} \mu_{ij} [Q_{ij} - y_{ij}(t_f)] + \sum_{(i,j) \in \mathcal{W}} \sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} \frac{1}{2} [h_p^k - \alpha \Phi_p^\varepsilon(t, h) - h_p]^2 \quad (4.68)$$

subject to:

$$\frac{dy_{ij}}{dt} = \sum_{p \in \mathcal{P}_{ij}} h_p(t) \quad \forall (i, j) \in \mathcal{W} \quad (4.69)$$

$$y_{ij}(t_0) = 0 \quad \forall (i, j) \in \mathcal{W} \quad (4.70)$$

$$h \geq 0 \quad (4.71)$$

Finding dual variables associated with terminal time demand constraints turns out to be relatively easy. Note that the relevant Hamiltonian for (4.68), (4.69), (4.70) and (4.71) is:

$$H^k = \frac{1}{2} \sum_{(i,j) \in \mathcal{W}} \sum_{p \in \mathcal{P}_{ij}} \left[h_p^k - \alpha \Phi_p^\varepsilon(t, h^k) - h_p \right]^2 + \sum_{(i,j) \in \mathcal{W}} \lambda_{ij} \sum_{p \in \mathcal{P}_{ij}} h_p \quad (4.72)$$

where each λ_{ij} is an adjoint variable obeying

$$\begin{aligned} \frac{d\lambda_{ij}}{dt} &= (-1) \frac{\partial H^k}{\partial y_{ij}} = 0 \quad \forall (i, j) \in \mathcal{W} \\ \lambda_{ij}(t_f) &= \frac{\partial \mu_{ij} [Q_{ij} - y_{ij}(t_f)]}{\partial y_{ij}(t_f)} = -\mu_{ij} \quad \forall (i, j) \in \mathcal{W} \end{aligned}$$

From the above we determine that

$$\lambda_{ij}(t) \equiv -\mu_{ij} \quad \forall t \in [t_0, t_f], \quad (i, j) \in \mathcal{W}$$

The minimum principle implies for any $p \in \mathcal{P}$,

$$h_p^{k+1}(t) = \arg \left\{ \frac{\partial H^k}{\partial h_p} = 0 \right\} = \arg \left\{ \left[\left(h_p^k(t) - \alpha \Phi_p^\varepsilon(t, h^k) - h_p(t) \right) \right] (-1) - \mu_{ij} = 0 \right\}$$

Thus we obtain

$$h_p^{k+1}(t) = \left[h_p^k(t) - \alpha \Phi_p^\varepsilon(t, h^k) + \mu_{ij} \right]_+ \quad \forall (i, j) \in \mathcal{W}, \quad p \in \mathcal{P}_{ij} \quad (4.73)$$

Notice that the following flow conservation constraint applies here.

$$\sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} h_p^{k+1}(t) dt = Q_{ij} \quad \forall (i, j) \in \mathcal{W}$$

Consequently the dual variable v_{ij} must satisfy

$$\sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} \left[h_p^k(t) - \alpha \Phi_p^\varepsilon(t, h^k) + \mu_{ij} \right]_+ dt = Q_{ij} \quad \forall (i, j) \in \mathcal{W} \quad (4.74)$$

Recall that each μ_{ij} is time invariant and notice that the equations of (4.74) are uncoupled; furthermore, the left hand side of (4.74) is strictly increasing in μ_{ij} , we see that simple root search will find the value of μ_{ij} satisfying (4.74). Once the μ_{ij} 's are determined, the new vector of path flows h^{k+1} for the next iteration may be computed from (4.73). As a result, we have the following algorithm.

Fixed-point Algorithm for BR-DUE

Step 0. Initialization. Identify an initial feasible solution $h^0 \in \Lambda_2$ and set iteration counter $k = 0$

Step 1. Find Φ^ε . Solve the dynamic network loading subproblem with path flows given by h^k , and obtain the effective path delays $\Psi(\cdot, h^k)$. Then define

$$\Phi_p^\varepsilon(t, h^k) = \max \{ \Psi_p(t, h^k), v_{ij}(h^k) + \varepsilon_{ij} \}$$

where $v_{ij}(h^k)$ is the minimum effective delay within origin-destination pair (i, j) .

Step 2. Find the dual variable. For each $(i, j) \in \mathcal{W}$, solve the following equation for μ_{ij} , using root-search algorithms.

$$\sum_{p \in \mathcal{P}_{ij}} \int_{t_0}^{t_f} \left[h_p^k(t) - \alpha \Phi_p^\varepsilon(t, h^k) + \mu_{ij} \right]_+ dt = Q_{ij}$$

Step 3. Update path flows. For each $(i, j) \in \mathcal{W}$ and $p \in \mathcal{P}_{ij}$, update the path flow as

$$h_p^{k+1}(t) = \left[h_p^k(t) - \alpha \Phi_p^\varepsilon(t, h^k) + \mu_{ij} \right]_+ \quad \forall t \in [t_0, t_f]$$

Step 4. Check for convergence. Terminate algorithm with output $h^* \approx h^k$ if

$$\frac{\|h^{k+1} - h^k\|_{L^2}}{\|h^k\|_{L^2}} \leq \epsilon$$

where $\epsilon \in \mathfrak{R}_{++}$ is a prescribed constant, and

$$\|h\|_{L^2} \doteq \sum_{p \in \mathcal{P}} \int_{t_0}^{t_f} h_p^2(t) dt$$

is the standard L^2 -norm on $(L^2[t_0, t_f])^{|\mathcal{P}|}$. Otherwise, set $k = k + 1$ and repeat Step 1 through Step 4.

5 Existence of solutions

The most obvious approach to establishing existence for any of the user equilibrium models presented above and in the existing literature is to convert the problem to an equivalent fixed point problem and then apply Brouwer's fixed-point existence theorem. One statement of Brouwer's theorem appears as Theorem 2 of Browder (1968):

Theorem 5.1. (Browder, 1968) *Let K be a compact convex subset of the locally convex topological vector space E , T a continuous (single-valued) mapping of K into E^* . Then there exists u_0 in K such that*

$$\langle T(u_0), u_0 - u \rangle \geq 0$$

$\forall u \in K$.

Proof. See Browder (1968). □

Approaches based on Brouwer's theorem require the set of feasible path flows (departure rates) under consideration to be compact and convex in a Hilbert space, and typically involve an *a priori* bound on all the path flows (Zhu and Marcotte, 2000).

5.1 Existence of E-DUE

Analysis regarding the existence of E-DUE is most facilitated by expressing it as a variational inequality:

$$\left. \begin{aligned} &\text{find } X^* \in \tilde{\Lambda} \text{ such that} \\ &\langle \mathcal{F}(X^*), X - X^* \rangle_E \geq 0 \\ &\forall X \in \tilde{\Lambda} \end{aligned} \right\} VI(\mathcal{F}, \Theta, \tilde{\Lambda}, t_0, t_f) \quad (5.75)$$

where $X = (h, Q)$, $\tilde{\Lambda}$ is defined in (3.10), and $\mathcal{F}(\cdot)$ is defined in (3.19). The inner product $\langle \cdot, \cdot \rangle_E$ on the extended space $E = (L^2[t_0, t_f])^{|\mathcal{P}|} \times \mathbb{R}^{|\mathcal{W}|}$ is defined in (3.17). Unlike the SRDC DUE introduced by Friesz et al. (1993), the DVI representation of E-DUE expressed by (3.16) has both infinite-dimensional and finite-dimensional terms. One advantage of invoking (5.75) is a more compact mathematical expression which absorbed these inhomogeneous terms. Therefore, in order to apply Theorem 5.1, one only has to investigate the operator $\mathcal{F}(\cdot)$ and the subset $\tilde{\Lambda}$.

Nevertheless, the aforementioned approach faces several theoretical difficulties: (1) the set $\tilde{\Lambda}$ is not compact in E ; and (2) a direct topological argument requires *a priori* bounds for the path flows, where those bounds do not arise from any behavioral argument or theory. These two difficulties are overcome by Han et al. (2013c) in the derivation of existence result for SRDC DUE with fixed demand. In that paper, the first difficulty is handled by successive finite-dimensional approximations of the set Λ_0 ; while the second one is overcome by introducing minor assumptions on the travelers' disutility function.

Using techniques introduced by Han et al. (2013c), we may show that the variational inequality (5.75) has a solution, a detailed proof is provided by Han et al. (2013d).

5.2 Existence of BR-DUE

We are mainly concerned with the existence of BR-DUE solutions that are not DUE solutions, since the latter is trivially a BR-DUE solution. Before the variational inequality formulation is introduced in this paper, very few analytical tools are available for studying existence of BR-DUE. Szeto and Lo (2006) propose to analyze the existence of route-choice BR-DUE by introducing a gap function, which measures the differences in travel costs among various route choices. However, that approach does not provide conditions under which a solution is guaranteed to exist.

Let us recall the VI formulation of SRDC BR-DUE established in Theorem 4.2. According to Theorem 5.6 of Han et al. (2013c), such a VI has a solution provided that the operator $\Phi^\varepsilon : (L^2[t_0, t_f])^{|\mathcal{P}|} \rightarrow (L^2[t_0, t_f])^{|\mathcal{P}|}$ is continuous, together with some other minor regularity assumptions. In general, Φ^ε can be continuous even if the effective delay operator Ψ is not. Therefore, conditions that guarantee the existence of BR-DUE should be weaker than those for DUE.

In order to say something about the continuity of Φ^ε , one needs to investigate the underlying dynamic network loading (DNL) model. In particular, we have the following existence theorem when the DNL procedure employs the Vickrey model (Vickrey, 1969; Han et al., 2013a,b)

Theorem 5.2. (Existence of BR-DUE) *Let the effective path delay be defined as*

$$\Psi_p(t, h) = D_p(t, h) + f(t + D_p(t, h) - T_A) \quad \forall p \in \mathcal{P}$$

where $h \in \Lambda_0$, T_A is a fixed constant indicating the target arrival time. Assume that $f(\cdot)$ is continuous on $[t_0, t_f]$ and satisfies

$$f(t_2) - f(t_1) \geq \Delta(t_2 - t_1) \quad \forall t_0 \leq t_1 < t_2 \leq t_f \quad (5.76)$$

for some $\Delta > -1$. Furthermore, assume that the dynamic network loading procedure employs the Vickrey model to describe flow dynamics. Then, For any fixed $\varepsilon \in \mathbb{R}^{|\mathcal{W}|}$, BR-DUE($\Psi, \varepsilon, \Lambda_0, t_0, t_f$) as in Definition 4.1 has a solution.

Proof. By Theorem 5.6 of Han et al. (2013c), it suffices to show that the operator

$$\Phi^\varepsilon : (L^2[t_0, t_f])^{|\mathcal{P}|} \rightarrow (L^2[t_0, t_f])^{|\mathcal{P}|} \quad (5.77)$$

$$\Phi_p^\varepsilon(t, h) = \max \{ \Psi_p(t, h), v_{ij}(h) + \varepsilon_{ij} \} \quad \forall p \in \mathcal{P}_{ij}, \quad \forall (i, j) \in \mathcal{W}$$

is continuous. Let $\{h^n\} \subset \Lambda_0$ be an arbitrary strongly converging sequence with limit $\tilde{h}$. By Theorem 5.3 of Han et al. (2013c), the corresponding effective path delays $\Psi(t, h^n)$ converges to $\Psi(t, \tilde{h})$ uniformly for all $t \in [t_0, t_f]$. Thus the function $\Phi^\varepsilon(\cdot, h^n)$ defined in (5.77) converges to $\Phi^\varepsilon(\cdot, \tilde{h})$ uniformly and also in the L^2 -norm. This shows that the operator Φ^ε is continuous. $\square$

Szeto (2003) identifies certain dynamic network loading procedures that do not admit a continuous effective delay operator. With these DNL models, a DUE in the sense of Friesz et al. (1993) may not exist. However, if one can show that the corresponding operator Φ^ε is continuous, then the existence of a BR-DUE can be guaranteed by invoking the analytical framework proposed in this section. Showing the continuity of Φ^ε when the corresponding effective delay operator is not continuous is beyond the scope of this paper but will remain an interesting research direction for traffic modelers.

6 Convergence of the fixed-point algorithms

Both fixed-point algorithms presented in Section 3.3 and Section 4.3 are particular instances of the abstract algorithm

$$z^{k+1} = G(z^k) \quad (6.78)$$

for solving the fixed point problem

$$z^* = G(z^*) \quad z^* \in V$$

where V is a proper Banach space. If the abstract operator $G(\cdot)$ satisfies the *contracting property*, i.e.

$$\|G(x) - G(y)\| \leq \delta \|x - y\| \quad \forall x, y \in V \quad (6.79)$$

for some $0 < \delta < 1$, then the sequence generated by (6.78) converges to the fixed point z^* , according to the Contracting Mapping Theorem (Rudin, 2006). However, the contracting property (6.79) is too restrictive in application, thus we need a relaxation known as *non-expansiveness*, that is,

$$\|G(x) - G(y)\| \leq \|x - y\| \quad \forall x, y \in V \quad (6.80)$$

The following theorem, taken from Friesz et al. (2011), is particularly useful to establish strong convergence of algorithms in the presence of non-expansive $G(\cdot)$.

Theorem 6.1. Consider the abstract mapping $G : V \rightarrow V$, where V is a Banach space. The sequence generated by

$$z^{k+1} = \beta_k z^0 + (1 - \beta_k)G(z^k) \quad (6.81)$$

converges strongly to a fixed point z^* of $G(\cdot)$, that is,

$$\lim_{k \rightarrow \infty} z^k \rightarrow z^* = G(z^*)$$

when $G(\cdot)$ is non-expansive, $z^0 \in V$ is an arbitrary point and

$$(i) \beta_k \in [0, 1]$$

$$(ii) \lim_{k \rightarrow \infty} \beta_k = 0$$

$$(iii) \sum_{k=0}^{\infty} \beta_k = \infty$$

$$(iv) \lim_{k \rightarrow \infty} (\beta_k - \beta_{k-1})(\beta_k)^{-1} = 0.$$

Proof. The reader is referred to Friesz et al. (2011) for a proof of strong convergence. $\square$

We call (6.81) the *modified fixed point algorithm*. By virtue of Theorem 6.1, in order to analyze convergence of the proposed fixed point algorithms, it suffices for us to check that the operator $G(\cdot)$ is non-expansive.

6.1 The E-DUE case

Let us recall the fixed-point iteration scheme from Section 3.3:

$$X^{k+1} = P_{\tilde{\Lambda}_0} \left[X^k - \alpha \mathcal{F}(X^k) \right] \quad k = 0, 1, \dots,$$

where $P_{\tilde{\Lambda}_0}[\cdot]$ is the minimum-norm projection onto the subset $\tilde{\Lambda}_0$, $X = (h, Q) \in \tilde{\Lambda}_0$, and

$$\mathcal{F}(X) = \mathcal{F}((h, Q)) = (\Psi(\cdot, h), \Theta^-[Q])$$

where $\Theta^-[Q] = -\Theta[Q]$. It is well-known that projection operators of the type $P_{\tilde{\Lambda}_0}[\cdot]$ are always non-expansive. We have the following convergence result.

Theorem 6.2. (Strong convergence of the modified fixed point algorithm for E-DUE) Assume that the effective path delay operator Ψ and the inverse demand function Θ satisfy the Lipschitz condition, that is,

$$\|\Psi(\cdot, h^1) - \Psi(\cdot, h^2)\|_{L^2} \leq L_1 \|h^1 - h^2\|_{L^2} \quad \forall h^1, h^2 \in (L_+^2[t_0, t_f])^{|\mathcal{P}|} \quad (6.82)$$

$$\|\Theta[Q_1] - \Theta[Q_2]\| \leq L_2 \|Q_1 - Q_2\| \quad \forall Q_1, Q_2 \in \mathfrak{R}_+^{|\mathcal{W}|} \quad (6.83)$$

for some $L_1 > 0$, $L_2 > 0$; and Ψ is strongly monotone on $(L_+^2[t_0, t_f])^{|\mathcal{P}|}$ with constant $K_1 > 0$, i.e.,

$$\langle \Psi(\cdot, h^1) - \Psi(\cdot, h^2), h^1 - h^2 \rangle \geq K_1 \|h^1 - h^2\|_{L^2}^2 \quad \forall h^1, h^2 \in (L_+^2[t_0, t_f])^{|\mathcal{P}|}$$

In addition, assume that the inverse demand function satisfies

$$\langle \Theta[Q_1] - \Theta[Q_2], Q_1 - Q_2 \rangle \leq -K_2 \|Q_1 - Q_2\|^2 \quad \forall Q_1, Q_2 \in \mathfrak{R}_+^{|\mathcal{W}|} \quad (6.84)$$

for some $K_2 > 0$. Then the modified fixed point algorithm converges strongly.

Proof. According to the preceding discussion, we only need to show that the map defined as

$$G(X^k) \doteq P_{\tilde{\Lambda}_0} \left[X^k - \alpha \mathcal{F}(X^k) \right]$$

is non expansive. Since the minimum norm projection is non-expansive, we have

$$\begin{aligned} & \left\| G(X^{k+1}) - G(X^k) \right\|_E^2 \\ & \leq \left\| X^{k+1} - \alpha \mathcal{F}(X^{k+1}) - X^k + \alpha \mathcal{F}(X^k) \right\|_E^2 \\ & = \left\| X^{k+1} - X^k \right\|_E^2 - 2\alpha \left\langle \mathcal{F}(X^{k+1}) - \mathcal{F}(X^k), X^{k+1} - X^k \right\rangle_E + \alpha^2 \left\| \mathcal{F}(X^{k+1}) - \mathcal{F}(X^k) \right\|_E^2 \\ & = \left\| X^{k+1} - X^k \right\|_E^2 \\ & \quad - 2\alpha \left(\left\langle \Psi(\cdot, h^{k+1}) - \Psi(\cdot, h^k), h^{k+1} - h^k \right\rangle + \left\langle \Theta^-[Q^{k+1}] - \Theta^-[Q^k], Q^{k+1} - Q^k \right\rangle \right) \\ & \quad + \alpha^2 \left(\left\| \Psi(\cdot, h^{k+1}) - \Psi(\cdot, h^k) \right\|_{L^2}^2 + \left\| \Theta^-[Q^{k+1}] - \Theta^-[Q^k] \right\|^2 \right) \\ & \leq \left\| X^{k+1} - X^k \right\|_E^2 - 2\alpha \left(K_1 \left\| h^{k+1} - h^k \right\|_{L^2}^2 + K_2 \left\| Q^{k+1} - Q^k \right\|^2 \right) \\ & \quad + \alpha^2 \left(L_1^2 \left\| h^{k+1} - h^k \right\|_{L^2}^2 + L_2^2 \left\| Q^{k+1} - Q^k \right\|^2 \right) \\ & \leq \left\| X^{k+1} - X^k \right\|_E^2 - 2\alpha \min \{K_1, K_2\} \left\| X^{k+1} - X^k \right\|_E^2 + \alpha^2 \max \{L_1^2, L_2^2\} \left\| X^{k+1} - X^k \right\|_E^2 \\ & = (1 - 2\alpha \min \{K_1, K_2\} + \alpha^2 \max \{L_1^2, L_2^2\}) \left\| X^{k+1} - X^k \right\|_E^2 \end{aligned}$$

Thus, to ensure non-expansiveness of $G(\cdot)$, it suffices to let

$$(1 - 2\alpha \min \{K_1, K_2\} + \alpha^2 \max \{L_1^2, L_2^2\}) \leq 1 \implies \alpha \leq \frac{2 \min \{K_1, K_2\}}{\max \{L_1^2, L_2^2\}}$$

□

Remark 6.3. *The convergence issue for computing dynamic user equilibrium has been a challenge for decades. Difficulties arise mainly from the non-monotone nature of the path delay operator or the effective path delay operator. Very few dynamic network loading models are reported in the literature that yield a strongly monotone delay operator, except the ones proposed by Mounce (2006) and Perakis and Roels (2006), which rely on somewhat restrictive assumptions. The contribution claimed by Theorem 6.2 should be interpreted as a generalization of the convergence proof for the fixed demand case to an elastic demand case, rather than solving the problem of monotonicity of the delay operator, which of course, is quite desirable and remains a focus of future research.*

The assumption (6.84) made on Θ can be illustrated as follows. At first glance it suggests that $-\Theta$ should be strongly monotone with constant $K_2 > 0$. If we can further assume that for each $(i, j) \in \mathcal{W}$, $v_{ij} = \Theta_{ij}[Q_{ij}]$, i.e. the inverse demands of different origin-destination pairs are decoupled, which is reasonably true, then (6.84) reduces to the following:

$$\frac{\Theta_{ij}[\hat{Q}_{ij}] - \Theta_{ij}[\tilde{Q}_{ij}]}{\hat{Q}_{ij} - \tilde{Q}_{ij}} \leq -K_{ij} \quad \forall \hat{Q}_{ij} > \tilde{Q}_{ij}, \quad \forall (i, j) \in \mathcal{W}$$

or simply

$$\Theta'_{ij}[Q_{ij}] \leq -K_{ij} \quad \forall (i, j) \in \mathcal{W}$$

if Θ_{ij} is differentiable, where $K_{ij} \in \mathbb{R}_{++}$ is a constant depending on origin-destination pair $(i, j) \in \mathcal{W}$. Clearly, such assumption holds for any affine or exponential functions.

6.2 The BR-DUE case

Regarding simultaneous route-and-departure choice dynamic user equilibrium with bounded rationality, we have the following convergence theorem for the fixed-point algorithm.

Theorem 6.4. (Strong convergence of the modified fixed point algorithm for SRDC BR-DUE) Fix $\varepsilon \in \mathbb{R}_+^{|\mathcal{W}|}$, assume that the operator $\Phi^\varepsilon : (L_+^2[t_0, t_f])^{|\mathcal{P}|} \rightarrow (L_+^2[t_0, t_f])^{|\mathcal{P}|}$ defined as

$$\Phi_p^\varepsilon(t, h) = \max \{ \Psi(t, h), v_{ij}(h) + \varepsilon_{ij} \} \quad \forall t \in [t_0, t_f], \quad p \in \mathcal{P}_{ij}, \quad (i, j) \in \mathcal{W}$$

satisfies the Lipschitz condition with constant $L > 0$; and Φ^ε is strongly monotone on Λ_0 with constant K . Then the modified fixed point algorithm converges strongly.

The proof of Theorem 6.4 follows closely that of Theorem 6.2, and is omitted in this paper.

7 Numerical studies

In this section, we will test the numerical performances of the proposed fixed-point algorithms for computing E-DUE and BR-DUE. Regarding the dynamic network loading (DNL) model, we employ the LWR-Lax model proposed by Friesz et al. (2013). Nonetheless, the fixed-point algorithms do not rely on any specific forms or assumptions of the link dynamics, flow propagation constraints and delay models; in other words, they can be equally applied to all DNL models.


All of the reported computations of the fixed-point algorithms are performed on a 2.7 GHz 4 GB of RAM computer. Every attempt was made to avoid the use of numerical tricks that could not be equally applied to all models.

7.1 DUE with elastic demand

We conduct numerical study of the fixed-point algorithm for E-DUE on two networks: a simple two-node, two-link network, and the 24-node, 76-arc Sioux Falls network.

7.1.1 Simple network

We begin with a simple network with just one origin-destination pair (1, 2) and two paths p_1 and p_2 , depicted in Figure 3. The link parameters are given in the table next to the network figure.



Arc	Jam density (vehicles / km)	Free flow speed (km / 5min)	Length (km)
1	800	6	4
2	600	3	4

Figure 3: Topology and arc-specific parameters of the simple network.

For simplicity, we choose the inverse demand function as an affine function:

$$v_{12} = \Theta_{12}[Q_{12}] = -0.025Q_{12} + 100 \quad (7.85)$$

The fixed-point algorithm took 33 iterations to declare convergence. The elastic demand, Q_{12}^k , at each iteration is shown in Figure 4. The average effective delay between origin-destination pair (1, 2) at each iteration is shown in Figure 5. We note that in each intermediate iteration, the effective delays experience by drivers are not the same over all departure time and routes. For this reason we can only show in Figure 5 the average effective delay computed as

$$v_{12}^k = \frac{\int_{t_0}^{t_f} [\Psi_1(t, h^k) h_1^k(t) + \Psi_2(t, h^k) h_2^k(t)] dt}{\int_{t_0}^{t_f} [h_1^k(t) + h_2^k(t)] dt}$$

The effective delays are gradually equalized when the algorithm converges. We can observe clearly from Figure 4 and Figure 5 the converging patterns of Q_{12}^k and v_{12}^k . Figure 6 shows the

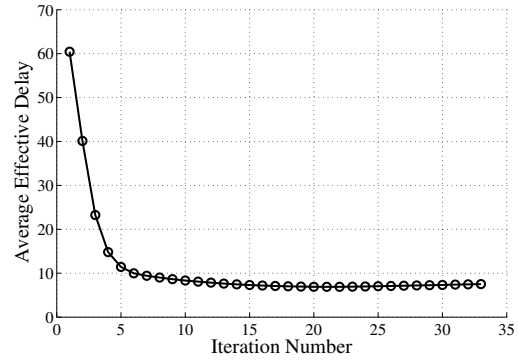
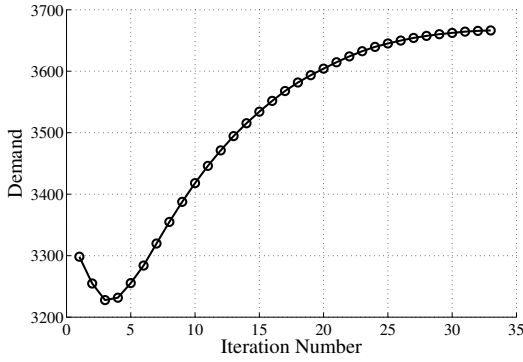


Figure 4: Simple network: Elastic demand at every iteration

Figure 5: Simple network: Average travel cost at every iteration

final path flows and effective delays when the algorithm terminates. We are assured that not only do Q_{12}^k and v_{12}^k converge, but also the effective path delays become equilibrated. When this happens, the average effective delay also becomes the minimum travel delay.

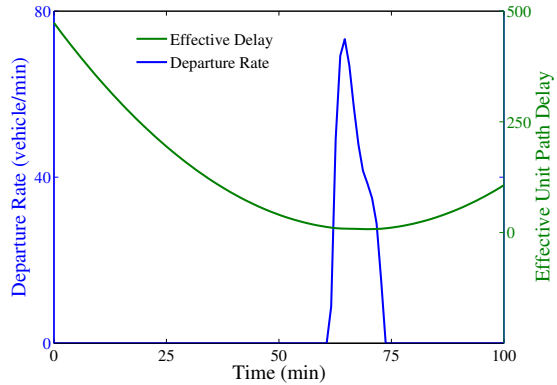
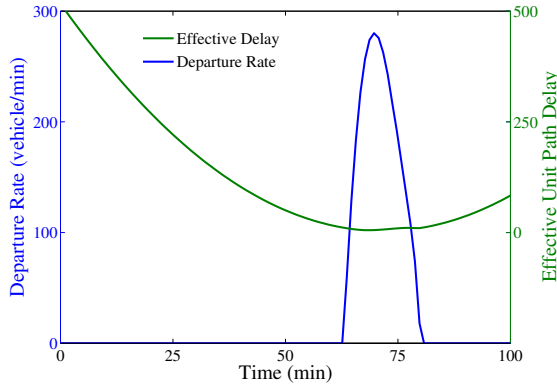


Figure 6: Simple network: Equilibrium path flows and effective path delays.

The relative distance between two consecutive iterates is defined as

$$D_{rel}^k \doteq \frac{\|(h^{k+1}, Q^{k+1}) - (h^k, Q^k)\|_E^2}{\|(h^k, Q^k)\|_E^2} \quad (7.86)$$

The fixed-point algorithms are terminated once $D_{rel}^k < \epsilon$, where ϵ is a fixed threshold. Figure 7 shows D_{rel}^k for each k , from which we confirm the convergence of the fixed-point algorithm.

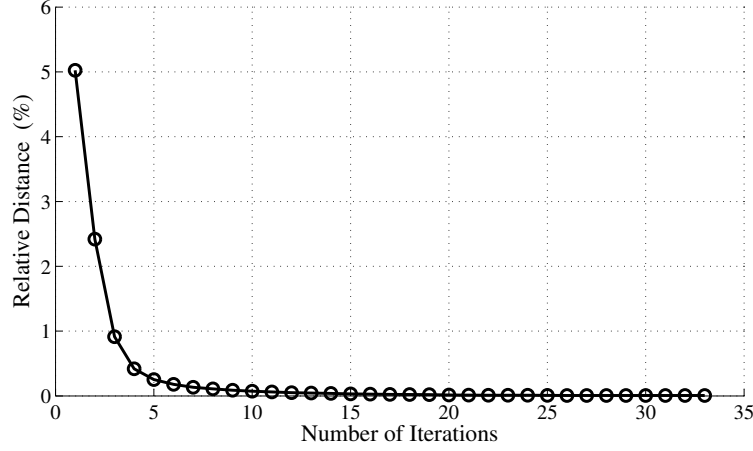


Figure 7: Simple network: Relative distance D_{rel}^k (in percent) at each iteration.

Finally, we need to check if v_{12}^* and Q_{12}^* claimed by the fixed-point algorithm satisfy the prescribed inverse demand relation (7.85). Figure 8 shows the pair (Q_{12}^k, v_{12}^k) at each iteration k . We observe that the generated sequence (Q_{12}^k, v_{12}^k) , $k \geq 1$ converges with the limit point on the straight line defined by the inverse demand function.

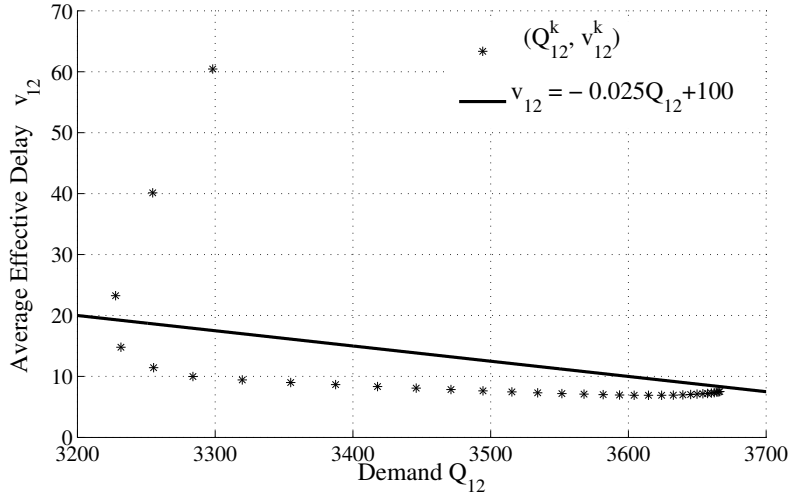


Figure 8: Simple network: Plot of the pair (Q_{12}^k, v_{12}^k) at the k^{th} -iteration. Notice that each v_{12}^k is the average travel cost of drivers. The solid line represents the prescribed inverse demand function.

7.1.2 The Sioux Falls network

We test our proposed fixed-point algorithm on a larger network (Sioux Falls) depicted in Figure 9. This network consists of 24 nodes and 76 arcs. We consider 10 origin-destination (OD) pairs and 209 paths for our numerical study. The set of OD pairs reads

$$\mathcal{W} = \{(1, 20), (3, 20), (4, 20), (5, 20), (9, 20), (12, 20), (11, 20), (10, 20), (2, 20), (6, 20)\}$$

Due to space limitation, we do not elaborate on our path set or the arc-specific parameters employed by the dynamic network loading procedure.

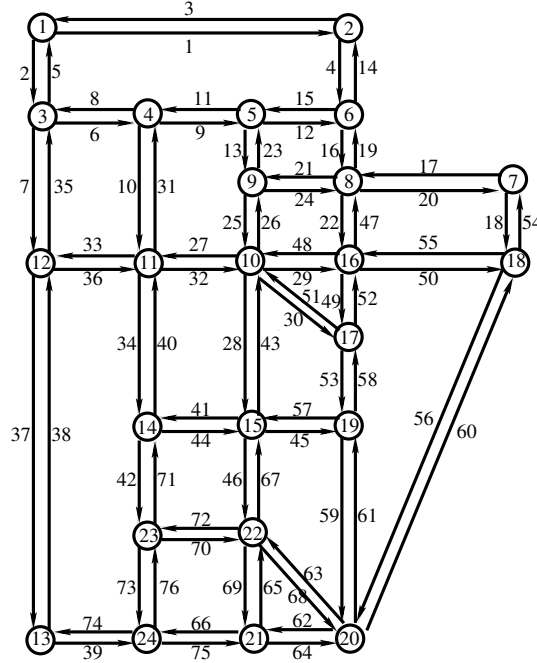


Figure 9: The Sioux Falls network, with 10 origin-destinations pairs and 209 paths selected.

We employ the following affine inverse demand function for all OD pairs:

$$v_{ij} = \Theta_{ij}[Q_{ij}] = -0.025Q_{ij} + 150 \quad \forall (i, j) \in \mathcal{W} \quad (7.87)$$

The fixed-point algorithm takes 36 iterations to claim convergence. The elastic demands between the 10 OD pairs at each iteration are shown in Figure 10, from which we observe converging patterns of these elastic demands.

For each origin-destination pair $(i, j) \in \mathcal{W}$, we plot the pairs (Q_{ij}^k, v_{ij}^k) for $k = 1, \dots, 36$, where Q_{ij}^k and v_{ij}^k are the travel demand and the average travel cost at the k^{th} -iteration, respectively. The results are summarized in Figure 11. It is clearly shown that each sequence (Q_{ij}^k, v_{ij}^k) , $(i, j) \in \mathcal{W}$ converges to some point on the line corresponding to the inverse demand function (7.87).

In order to demonstrate that when the algorithm terminates, the effective path delays within each OD pair are equalized, we show in Figure 12 the departure rates and the corresponding effective delays of two paths p_{50} and p_{150} . From Figure 12 we see that not only do Q_{ij}^k and v_{ij}^k converge, the travel costs are also equilibrated and independent of departure time selected by travelers. Finally, the relative distance D_{rel}^k defined in (7.86) is plotted against the iteration number in Figure 13. The relative distance is monotonically decreasing with each iteration, and satisfies the termination criterion (< 0.01) after 36 iterations.

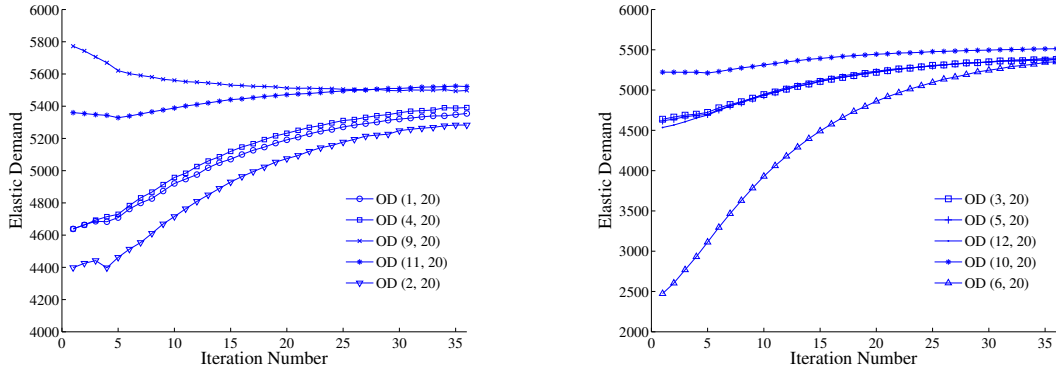


Figure 10: Sioux Falls network: Elastic OD demands at each iteration.

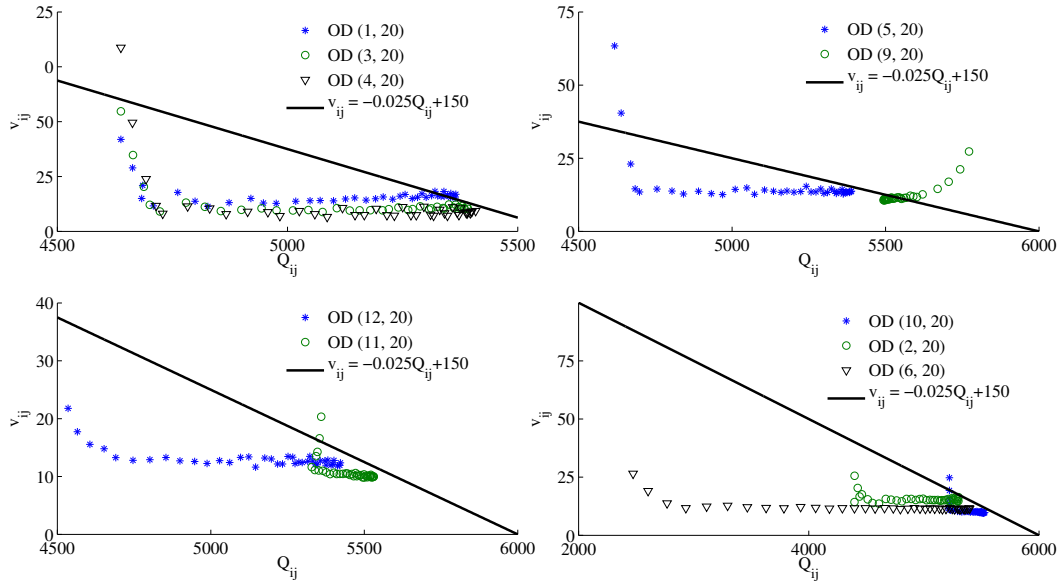


Figure 11: Sioux Falls network: Convergence of the sequence (Q_{ij}^k, v_{ij}^k) to the inverse demand relation.

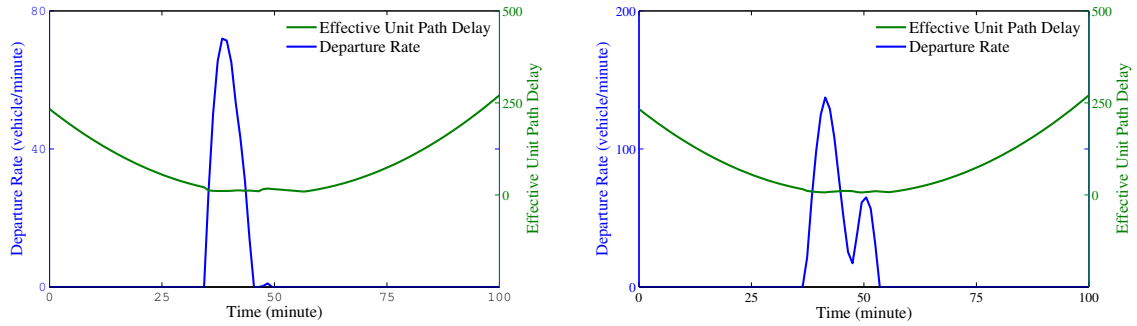


Figure 12: Sioux Falls network: Path departure rates and effective path delays. Left: Path 50; right: Path 150.

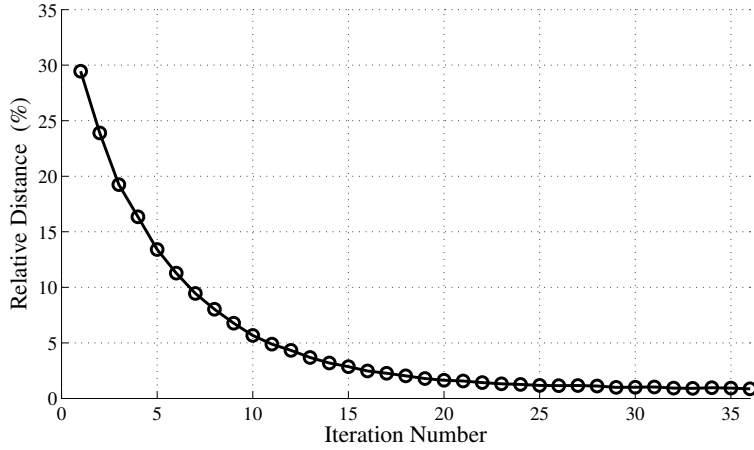


Figure 13: Sioux Falls network: Relative distance D_{rel}^k (in percent) at each iteration.

7.2 DUE with bounded rationality

In the first half of this section, we will illustrate the solutions of the BR-DUE problem computed by the fixed-point algorithm on two networks: the simple network and the Sioux Falls network. In the second half, we will test the convergence of the algorithm on four different networks.

7.2.1 Simple network

Let us consider again the simple network illustrated in Figure 3. Assume there is a fixed demand $Q_{12} = 3300$ between origin-destination pair (1, 2). As termination criterion for the fixed-point algorithm, we stipulate that $D_{ref}^k < 0.001$, where D_{ref}^k is the relative distance between two consecutive iterates:

$$D_{ref}^k \doteq \frac{\|h^{k+1} - h^k\|_{L^2}^2}{\|h^k\|_{L^2}^2}$$

We consider the following value of tolerance: $\varepsilon = 15$. The fixed-point algorithm takes 11 iterations to declare convergence. The resulting BR-DUE path flows and associated travel delays are shown in Figure 14. We can see that when the algorithm terminates, the path flows indeed satisfy the variational inequality (4.47) as they are located at the “flat bottom” of the curves of Φ^ε . The second row of Figure 14 shows the actual effective delay. One can see that the travel costs experienced by all travelers are within the indifference band with width 15.

7.2.2 The Sioux Falls network

We consider the Sioux Falls network with the same set of origin-destination (OD) pairs and the same set of paths as Section 7.1.2. For simplicity, we assume the same tolerance $\varepsilon = 10$ for all OD pairs. The termination criterion is again $D_{ref}^k < 0.001$.

The fixed-point algorithm takes 15 iterations. Figure 15 shows two path flows with their corresponding Φ^ε and Ψ . The first row shows flat bottom of the functions Φ_{25}^ε and Φ_{200}^ε , indicating that the path flows generated by the algorithm solves the variational inequality (4.47). The second row shows the actual effective path delays experienced by travelers, which are within the range of $\varepsilon = 10$.

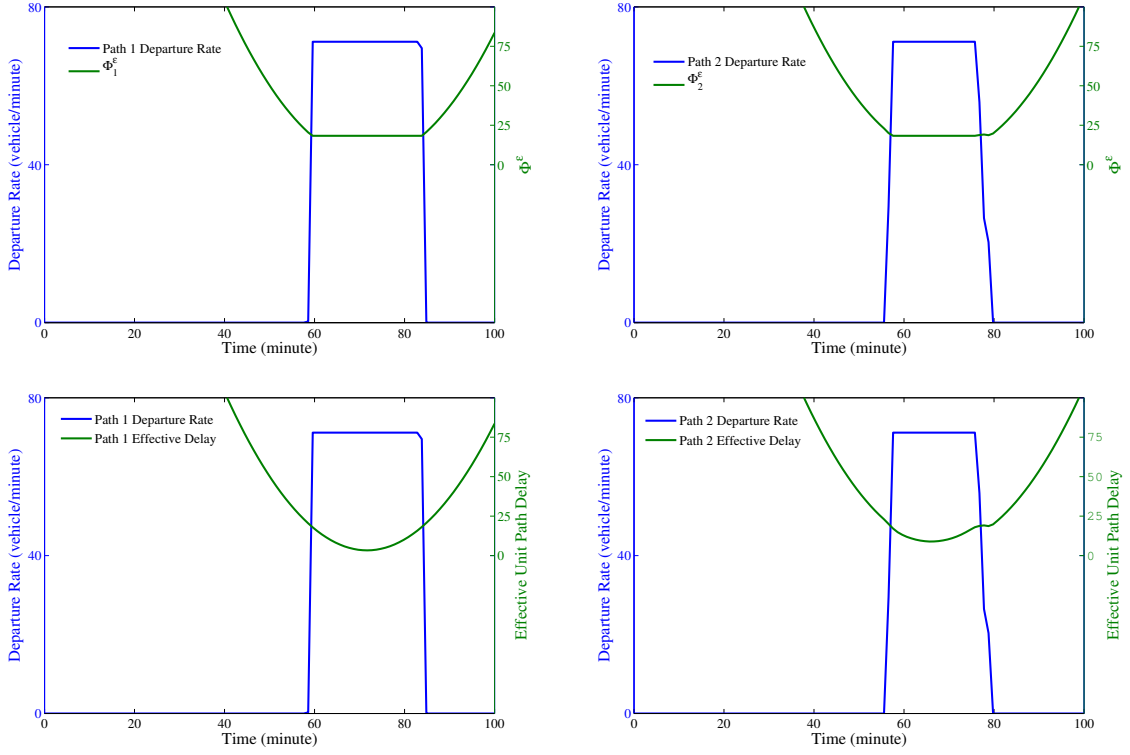


Figure 14: Simple network: BR-DUE when the tolerance $\varepsilon = 15$. First row: Path flows and the corresponding $\Phi^\epsilon(\cdot)$. Second row: Path flows and the corresponding effective delays $\Psi(\cdot)$

7.2.3 Convergence of the fixed-point algorithm for BR-DUE

In this section, we test the convergence of the fixed-point algorithm with different values of ε . For the comprehensiveness of our experiment, we consider two additional networks depicted in Figure 16, so that there are totally four networks: the two-arc, two-node simple network; the six-arc, five-node small network; the 19-arc, 13-node medium network; and the 76-arc, 24-node Sioux Falls network.

The termination criterion is,

$$D_{ref}^k \doteq \frac{\|h^{k+1} - h^k\|_{L^2}^2}{\|h^k\|_{L^2}^2} < \epsilon$$

where we choose $\epsilon = 0.001$ for the first three networks and choose $\epsilon = 0.01$ for the Sioux Falls network.

We test the proposed fixed-point algorithm with different values of the tolerance ε . The results are summarized in Table 1 through Table 4. From these tables, we observe a discernible improvement of convergence when the value of ε becomes larger. This coincides with the intuition that when the indifference band is wider, a BR-DUE is more likely to be reached. However, we note that in practice, the choice of ε should be based on a behavioral study of travelers and/or empirical calibration, rather than a numerical trick used to facilitate convergence.

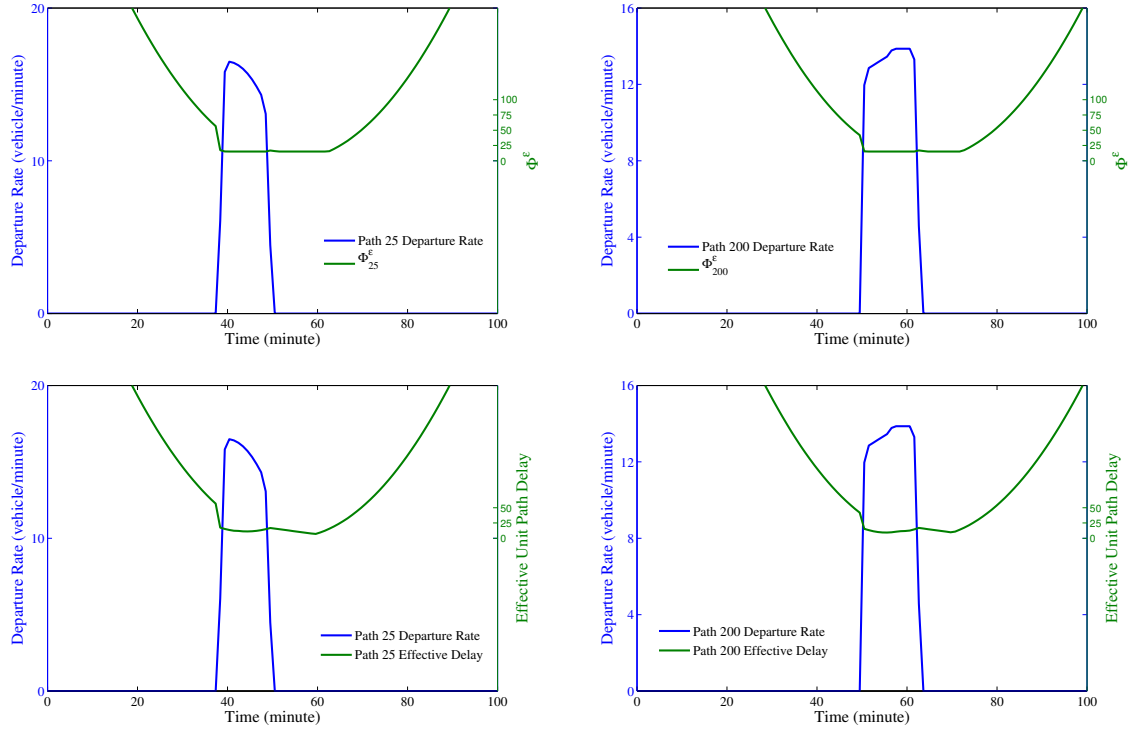


Figure 15: The Sioux Falls network: BR-DUE when the tolerance $\varepsilon = 10$. First row: Path flows and corresponding Φ^ε . Second row: Path flows and the actual travel costs.

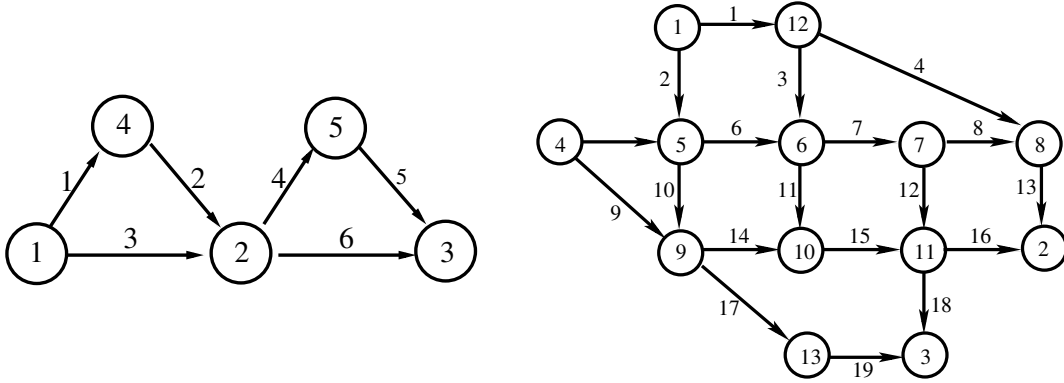


Figure 16: Left: The six-arc, five-node small network. Right: The 19-arc, 13-node medium network.

	$\varepsilon = 0$	$\varepsilon = 5$	$\varepsilon = 10$	$\varepsilon = 15$	$\varepsilon = 20$	$\varepsilon = 25$
Iteration	19	16	15	11	9	9
Time (s)	3.09	2.72	2.49	1.91	1.58	1.61

Table 1: The two-arc, two-node simple network: Performance of the fixed-point algorithm for BR-DUE, when the termination threshold $\epsilon = 0.001$.

	$\varepsilon = 0$	$\varepsilon = 5$	$\varepsilon = 10$	$\varepsilon = 15$	$\varepsilon = 20$	$\varepsilon = 25$
Iteration	18	18	16	15	14	13
Time (s)	9.99	9.63	9.02	8.45	7.98	7.51

Table 2: The six-arc, five-node small network: Performance of the fixed-point algorithm for BR-DUE, when the termination threshold $\epsilon = 0.001$.

	$\varepsilon = 0$	$\varepsilon = 5$	$\varepsilon = 10$	$\varepsilon = 15$	$\varepsilon = 20$	$\varepsilon = 25$
Iteration	22	13	11	13	10	12
Time (s)	12.50	7.79	6.76	7.95	6.35	7.69

Table 3: The 19-arc, 13-node medium network: Performance of the fixed-point algorithm for BR-DUE, when the termination threshold $\epsilon = 0.001$.

	$\varepsilon = 0$	$\varepsilon = 5$	$\varepsilon = 10$	$\varepsilon = 15$	$\varepsilon = 20$	$\varepsilon = 25$
Iteration	24	7	5	6	5	4
Time (s)	459.3	154.1	119.5	147.6	122.2	104.5

Table 4: The 76-arc, 24-node Sioux Falls network: Performance of the fixed-point algorithm for BR-DUE, when the termination threshold $\epsilon = 0.01$.

8 Conclusion

In this paper, we have presented an analytical framework, known as (differential) variational inequality, that is proven to be a powerful tool for analyzing and computing dynamic user equilibria. Two natural extensions of the classical notion of simultaneous route-and-departure choice dynamic user equilibrium (Friesz et al., 1993) are discussed in this paper. The first one is DUE with elastic travel demands (E-DUE); the second one is DUE with bounded rationality (BR-DUE). Both models have been studied in the literature to some extent but are never analyzed using the mathematical paradigm of differential variational inequality.

We present the variational inequality (VI) and differential variational inequality (DVI) formulations of both E-DUE and BR-DUE. In particular, the VI formulation for BR-DUE is original in the existing literature. Analysis regarding the existence of both E-DUE and BR-DUE is most facilitated by expressing them as a variational inequality in properly defined Hilbert spaces and by invoking the Brouwer’s fixed point theorem. Efforts in this direction have been elaborated by two papers Han et al. (2013c) and Han et al. (2013d). The VI formulations allow the still emerging theory of differential variational inequality Pang and Stewart (2008) to be applied for analyzing and computing user equilibrium solutions, with surprisingly simple and elegant analytical results. We have demonstrated in this paper that both E-DUE and BR-DUE can be computed in continuous time in the DVI framework. The fixed-point-problem formulations also allow us to conduct rigorous analysis on the convergence of algorithms.

One important direction of future research is to establish convergence results for a more general class of delay operators. Existing analyses on the convergence issue, described by either this paper or by Friesz et al. (2011), rely on some sort of monotonicity of the effective delay operator. As shown by the numerical results, the BR-DUE enjoys an improved convergence with positive ε . Thus studying the monotonicity of the new operator Φ^ε may provide a way of rigorously analyzing convergence and shed light on the monotonicity of the effective path

delay operator Ψ .

References

- Arnott, R., dePalma, A., Lindsey, R., 1993. A structural model of peak-period congestion: A traffic bottleneck with elastic demand. *The American Economic Review* 83 (1), 161-179.
- Avineri, E., Prashker, J., 2004. Violations of expected utility theory in route-choice stated preferences: Certainty effect and inflation of small probabilities. *Transportation Research Record*, 1894 (1), 222-229.
- Browder, F.E., 1968. The fixed point theory of multi-valued mappings in topological vector spaces. *Mathematische Annalen* 177, 283-301.
- Di, X., Liu, H.X., Pang, J., Ban, X., 2013. Boundedly rational user equilibria (BRUE): Mathematical formulation and solution sets. In *Proceedings of the International Symposium on Transportation and Traffic Theory*.
- Farouq, N.E., 2001. Pseudomonotone variational inequalities: Convergence of proximal methods. *Journal of optimization theory and applications* 109 (2), 311-326.
- Friesz, T. L., 2010. *Dynamic Optimization and Differential Games*. Springer.
- Friesz, T.L., Bernstein, D., Smith, T., Tobin, R., Wie, B., 1993. A variational inequality formulation of the dynamic network user equilibrium problem. *Operations Research* 41 (1), 80-91.
- Friesz, T.L., Bernstein, D., Suo, Z., Tobin, R., 2001. Dynamic network user equilibrium with state-dependent time lags. *Networks and Spatial Economics* 1 (3/ 4), 319-347.
- Friesz, T.L., Han, K., Neto, P.A., Meimand, A., Yao, T., 2013. Dynamic user equilibrium based on a hydrodynamic model. *Transportation Research Part B* 47 (1), 102-126.
- Friesz, T. L., Kim, T., Kwon, C., Rigdon, M.A., 2011. Approximate dynamic network loading and dual time scale dynamic user equilibrium. *Transportation Research Part B* 45 (1), 176-207.
- Friesz, T. L., Meimand, A., 2013. Dynamic user equilibria with elastic demand (T. L. Friesz). *Transportmetrica*, forthcoming.
- Friesz, T.L., Mookherjee, R., 2006. Solving the dynamic network user equilibrium problem with state dependent time shifts. *Transportation Research Part B* 40 (3), 207-229.
- Gifford, J. L., Checherita, C., 2007. Bounded rationality and transportation behavior: lessons for public policy. In: *Transportation Research Board 86th Annual Meeting*, No. 07-2451.
- Han, K., Friesz, T.L., Yao, T., 2013a. A partial differential equation formulation of Vickrey's bottleneck model, part I: Methodology and theoretical analysis. *Transportation Research Part B* 49, 55-74.
- Han, K., Friesz, T.L., Yao, T., 2013b. A partial differential equation formulation of Vickrey's bottleneck model, part II: Numerical analysis and computation. *Transportation Research Part B* 49, 75-93.

- Han, K., Friesz, T.L., Yao, T., 2013c. Existence of simultaneous route and departure choice dynamic user equilibrium. *Transportation Research Part B* 53, 17-30.
- Han, K., Friesz, T.L., Yao, T., 2013d. Network user equilibrium with elastic demand: Formulation and qualitative analysis. *Working paper*.
- Han, L., Ukkusuri S., Doan K., 2011. Complementarily formulations for the cell transmission model based dynamic user equilibrium with departure time choice, elastic demand and user heterogeneity. *Transportation Research Part B* 45 (10), 1749-1767.
- Han, Q., Timmermans, H., 2006. Interactive learning in transportation networks with uncertainty, bounded rationality, and strategic choice behavior: Quantal response model. *Transportation Research Record*, 1964 (1), 2734.
- Hu, T., Mahmassani, H., 1997. Day-to-day evolution of network flows under real-time information and reactive signal control. *Transportation Research Part C* 5 (1), 51-69.
- Huang, H.J., Lam, W.H.K., 2002. Modeling and solving dynamic user equilibrium route and departure time choice problem in network with queues. *Transportation Research Part B* 36, 253-273.
- Khisty, C. J., Arslan, T., 2005. Possibilities of steering the transportation planning process in the face of bounded rationality and unbounded uncertainty. *Transportation Research Part C*, 13 (2), 7792.
- Lighthill, M., Whitham, G., 1955. On kinematic waves. II. A theory of traffic flow on long crowded roads. *Proceedings of the Royal Society of London: Series A* 229 (1178), 317- 345.
- Lou, Y., Yin, Y., Lawphongpanich, S., 2010. Robust congestion pricing under bounded rational user equilibrium. *Transportation Research Part B* 44 (1), 15-28.
- Mahmassani, H., Chang, G., 1987. On boundedly rational user equilibrium in transportation systems. *Transportation Science* 21 (2), 8999.
- Mahmassani, H., Jayakrishnan, R., 1991. System performance and user response under real-time information in a congested traffic corridor. *Transportation Research Part A* 25 (5), 293-307.
- Mahmassani, H., Liu, Y., 1999. Dynamics of commuting decision behavior under advanced traveller information systems. *Transportation Research Part C* 7 (2-3), 91-107.
- Mahmassani, H., Zhou, X., Lu, C., 2005. Toll pricing and heterogeneous users: approximation algorithms for finding bicriterion time-dependent efficient paths in large-scale traffic networks. *Transportation Research Record*, 1923 (1), 2836.
- Marsden, G., Frick, K. T., May, A. D., Deakin, E., 2012. Bounded rationality in policy learning amongst cities: lessons from the transport sector. *Environment and Planning A* 44 (4), 905920.
- Mounce, R., 2006. Convergence in a continuous dynamic queuing model for traffic networks. *Transportation Research Part B* 40 (9), 779-791.
- Pang, J.S., Stewart, D.E., 2008. Differential variational inequalities. *Mathematical Programming, Series A* 113 (2), 345-424.

- Perakis, G., Roels, G., 2006. An analytical model for traffic delays and the dynamic user equilibrium problem. *Operations Research* 54 (6), 1151-1171.
- Richards, P.I., 1956. Shockwaves on the highway. *Operations Research* 4 (1), 42-51.
- Rudin, W., 2006. *Functional Analysis*. McGraw-Hill.
- Simon, H.A., 1957. A behavioral model of rational choice. In *Models of Man, Social and Mathematical Essays on Rational Human Behavior in a Social Setting*. New York: Wiley.
- Simon, H.A., 1990. A mechanism for social selection and successful altruism. *Science* 250 (4988), 1665-1668.
- Simon, H.A., 1991. Bounded rationality and organizational learning. *Organization Science* 2 (1), 125-134.
- Szeto, W.Y., 2003. *Dynamic Traffic Assignment: Formulations, properties, and extensions*. PhD Thesis, The Hong Kong University of Science and Technology, China.
- Szeto, W.Y., Lo, H.K., 2004. A cell-based simultaneous route and departure time choice model with elastic demand. *Transportation Research Part B* 38, 593-612.
- Szeto, W.Y., Lo, H.K., 2006. Dynamic traffic assignment: Properties and extensions. *Transportmetrica* 2 (1), 31-52.
- Vickrey, W.S., 1969. Congestion theory and transport investment. *The American Economic Review* 59 (2), 251-261.
- Wardrop, J., 1952. Some theoretical aspects of road traffic research. In *ICE Proceedings: Part II, Engineering Divisions* 1, 325-362.
- Wie, B. W., Tobin R. L., Carey. M., 2002. The existence, uniqueness and computation of an arc-based dynamic network user equilibrium formulation. *Transportation Research Part B* 36, 897-918.
- Yang, H., Huang, H.J., 1997. Analysis of the time-varying pricing of a bottleneck with elastic demand using optimal control theory. *Transportation Research Part B* 31 (6), 425-440.
- Yang, H., Meng Q., 1998. Departure time, route choice and congestion toll in a queuing network with elastic demand. *Transportation Research Part B* 32 (4), 247-260.
- Zhu, D.L., Marcotte, P., 2000. On the existence of solutions to the dynamic user equilibrium problem. *Transportation Science* 34 (4), 402-414.